



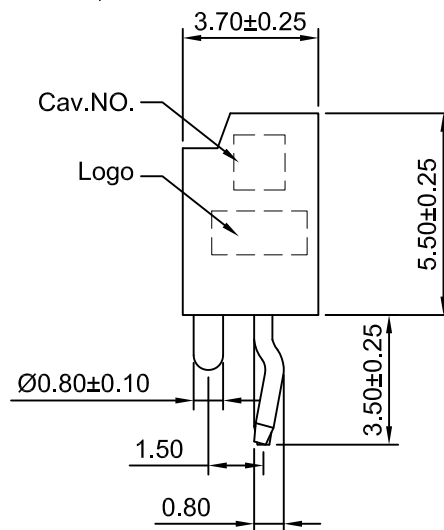
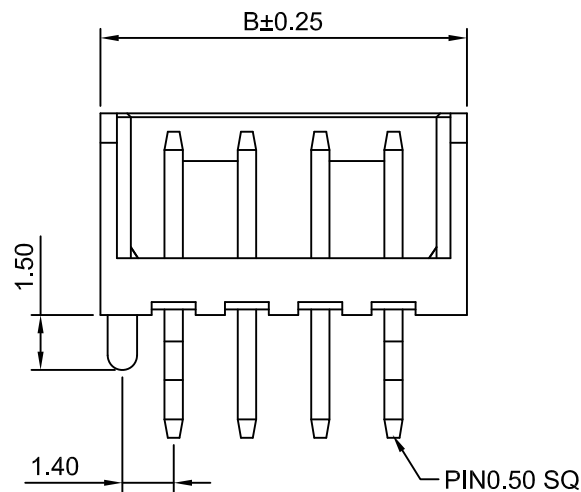
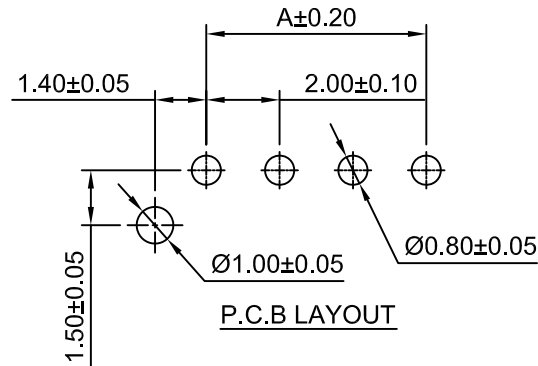


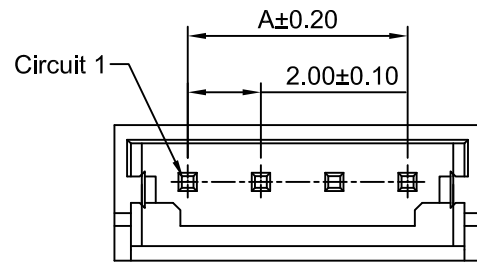

3P



2P



2P

SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	11P	20.00	24.00
3P	4.00	8.00	12P	22.00	26.00
4P	6.00	10.00	13P	24.00	28.00
5P	8.00	12.00	14P	26.00	30.00
6P	10.00	14.00	15P	28.00	32.00
7P	12.00	16.00	16P	30.00	34.00
8P	14.00	18.00	17P	32.00	36.00
9P	16.00	20.00	18P	34.00	38.00
10P	18.00	22.00			

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	2.00mm PITCH VERTICAL WAFER
DRAWN	CHK'D	APPR	
Chengbiao Ye	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO.
			A2010WV-F-XP
			REV A1