
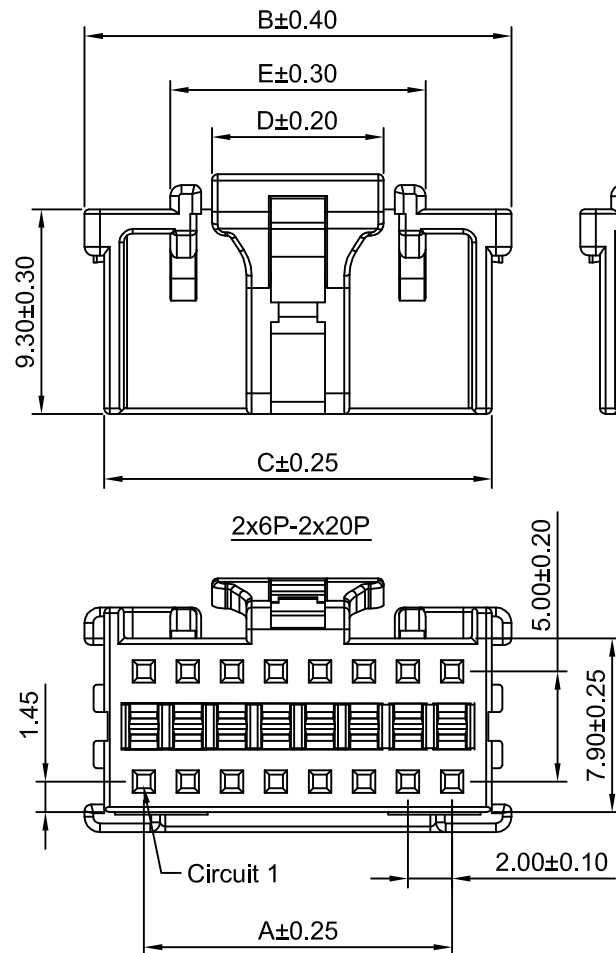

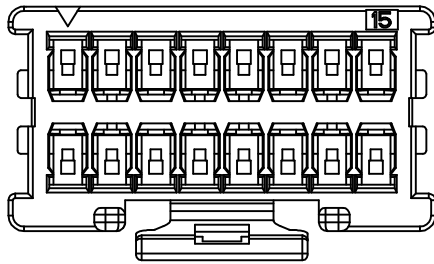


2x4P-2x5P

Logo on the back

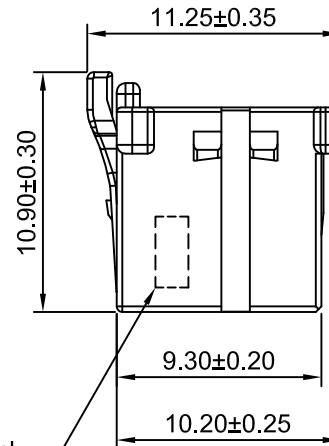

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Material: Nylon66, UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)				
	A	B	C	D	E
A2011HA-2x4P	6.00	11.40	9.60	4.70	8.40
A2011HA-2x5P	8.00	13.40	11.60	4.70	8.40
A2011HA-2x6P	10.00	15.40	13.60	7.80	11.60
A2011HA-2x7P	12.00	17.40	15.60	7.80	11.60
A2011HA-2x8P	14.00	19.40	17.60	7.80	11.60
A2011HA-2x9P	16.00	21.40	19.60	7.80	11.60
A2011HA-2x10P	18.00	23.40	21.60	7.80	11.60
A2011HA-2x11P	20.00	25.40	23.60	7.80	11.60
A2011HA-2x12P	22.00	27.40	25.60	7.80	11.60
A2011HA-2x13P	24.00	29.40	27.60	7.80	11.60
A2011HA-2x14P	26.00	31.40	29.60	7.80	11.60
A2011HA-2x15P	28.00	33.40	31.60	7.80	11.60
A2011HA-2x16P	30.00	35.40	33.60	7.80	11.60
A2011HA-2x17P	32.00	37.40	35.60	7.80	11.60
A2011HA-2x18P	34.00	39.40	37.60	7.80	11.60
A2011HA-2x19P	36.00	41.40	39.60	7.80	11.60
A2011HA-2x20P	38.00	43.40	41.60	7.80	11.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH DUAL ROW HOUSING	
Dengchun Yi	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A2
x,xx±0.25				
x,xx±0.20				
x,xxx±0.15				
ANGLES ±1°				
		A2011HA-2xXP		