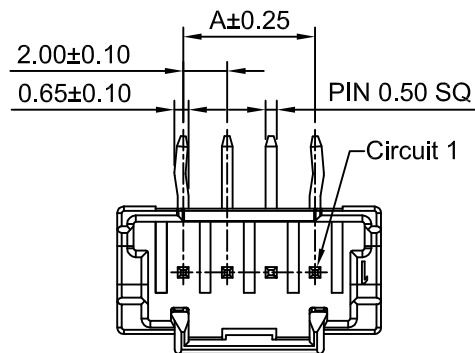


Ordering Information:
A2011WRA-XP - *** - ** - ** - ** - **
1 2 3 4 5 6





- 1.Part NO.
- 2.Style:
(Blank): TYPE 1
2: TYPE 2
- 3.Material:
(Blank): PBT+15%GF,UL94V-0(White)
GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.
- 4.Color:
(Blank): see section 3 materia
BK: Black YL: Yellow
RD: Red BL: Blue
PK: Pink GN: Green
BR: Brown OR: Orange
VL: Violet GY: Gray
PBL: Pale Blue YGN: Yellowish Green
FOR: Fluorescent Orange YGN: Yellowish Green
- 5.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel
- 6.Packing:
(Blank): Bag

SPECIFICATIONS:


Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2011WRA-2P	2.00	8.00
A2011WRA-3P	4.00	10.00
A2011WRA-4P	6.00	12.00
A2011WRA-5P	8.00	14.00
A2011WRA-6P	10.00	16.00
A2011WRA-7P	12.00	18.00
A2011WRA-8P	14.00	20.00
A2011WRA-9P	16.00	22.00
A2011WRA-10P	18.00	24.00
A2011WRA-11P	20.00	26.00
A2011WRA-12P	22.00	28.00
A2011WRA-13P	24.00	30.00
A2011WRA-14P	26.00	32.00
A2011WRA-15P	28.00	34.00

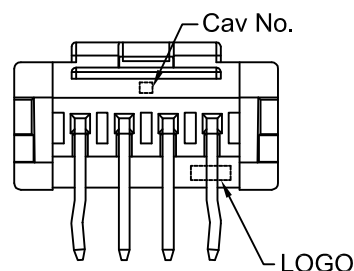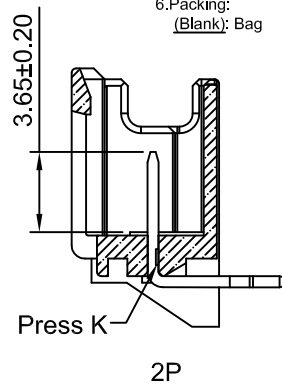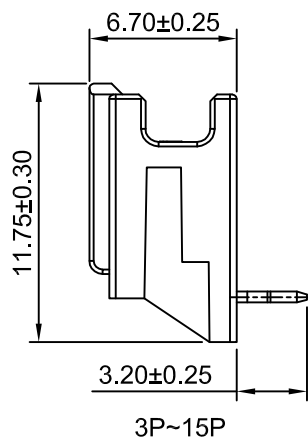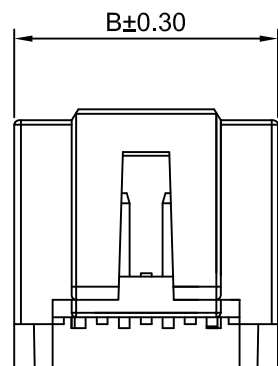

Type 1



Type 2

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.00mm PITCH RIGHT-ANGLE WAFER	
DRAWN	CHK'D	APPR'D		
Jianying Zhu	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION		
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.	REV
			A2011WRA-XP	A0

A0	NEW RELEASE	2023.12.14
REV	DESCRIPTION	DATE