

Ordering Information:

A2011WVA-XP - *** - ** - ** - ** - **
1 2 3 4 5 6

1.Part NO.

2.Style:

(Blank): TYPE 1

2: TYPE 2

3.Material:

(Blank): PBT+15%GF,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

4.Color:

(Blank): see section 3 materia

BK: Black

RD: Red

PK: Pink

BR: Brown

VI: Violet

PBL: Pale Blue

FOR: Fluorescent Orange

5.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

6.Packing:

(Blank): Bag

YL: Yellow

BL: Blue

GN: Green

OR: Orange

GY: Gray

YGN: Yellowish Green

YGN: Yellowish Green

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC





Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

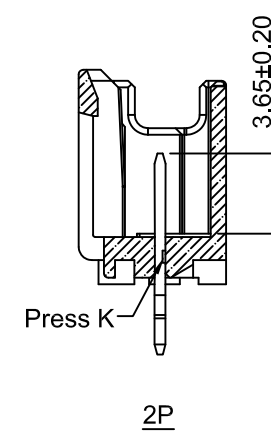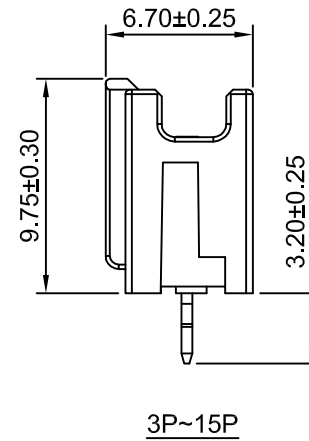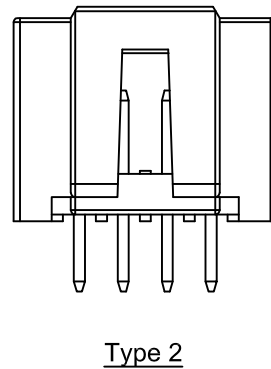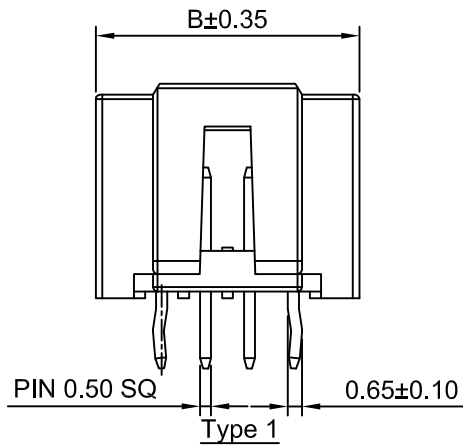

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2011WVA-2P	2.00	8.00
A2011WVA-3P	4.00	10.00
A2011WVA-4P	6.00	12.00
A2011WVA-5P	8.00	14.00
A2011WVA-6P	10.00	16.00
A2011WVA-7P	12.00	18.00
A2011WVA-8P	14.00	20.00
A2011WVA-9P	16.00	22.00
A2011WVA-10P	18.00	24.00
A2011WVA-11P	20.00	26.00
A2011WVA-12P	22.00	28.00
A2011WVA-13P	24.00	30.00
A2011WVA-14P	26.00	32.00
A2011WVA-15P	28.00	34.00



CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	2.00mm PITCH VERTICAL WAFER-WITH FOOT		
DRAWN	CHK'D	APPR			
Jianying Zhu	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO.		REV A0
			A2011WVA-XP		

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2020.09.19