

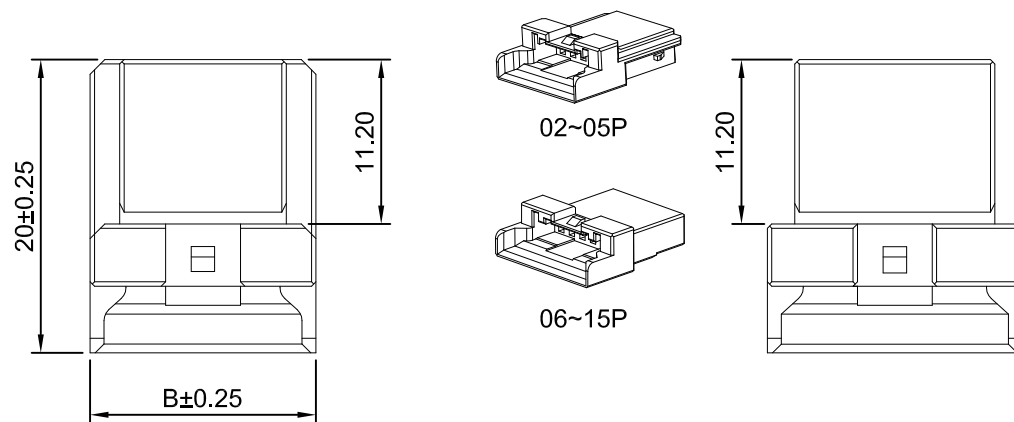



2P~5P




6P~15P



2P



3P



4P

Ordering Information:

A2012HMA-XP - ***
1 2

1.Part NO.

2.Color:

(Blank):White

RD:Red

BL:Blue

GN:Green

YL:Yellow

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 15mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0


Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2012HMA-2P	---	9.40
A2012HMA-3P	4.00	11.40
A2012HMA-4P	6.00	13.40
A2012HMA-5P	8.00	15.40
A2012HMA-6P	10.00	17.40
A2012HMA-7P	12.00	19.40
A2012HMA-8P	14.00	21.40
A2012HMA-9P	16.00	23.40
A2012HMA-10P	18.00	25.40
A2012HMA-11P	20.00	27.40
A2012HMA-12P	22.00	29.40
A2012HMA-13P	24.00	31.40
A2012HMA-14P	26.00	33.40
A2012HMA-15P	28.00	35.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2	2.00mm PITCH SINGLE ROW HOUSING	
DRAWN	CHK'D	APPR		
Chengbiao Ye	Dianhui Wan	Jack Yin	DRAWING NO.	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2012HMA-XP	
A0	NEW RELEASE	2022.09.08	REV A0	
REV	DESCRIPTION	DATE		

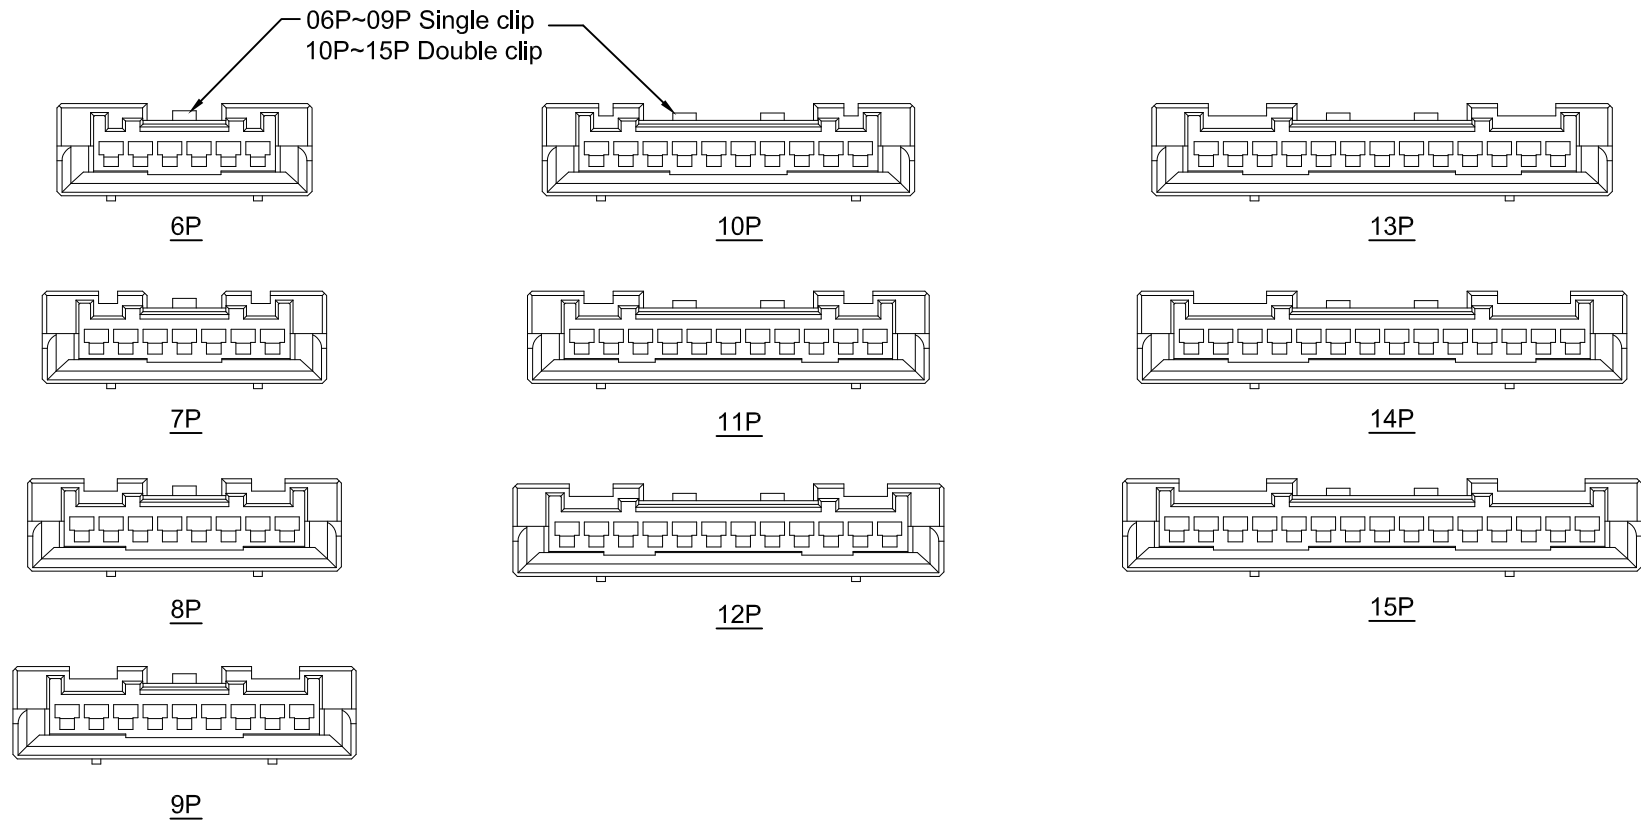

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 2.00mm PITCH SINGLE ROW HOUSING	
mm	2:1	2 of 2		
DRAWN	CHK'D	APPR		
Chengbiao Ye	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A0
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				
		A2012HMA-XP		