
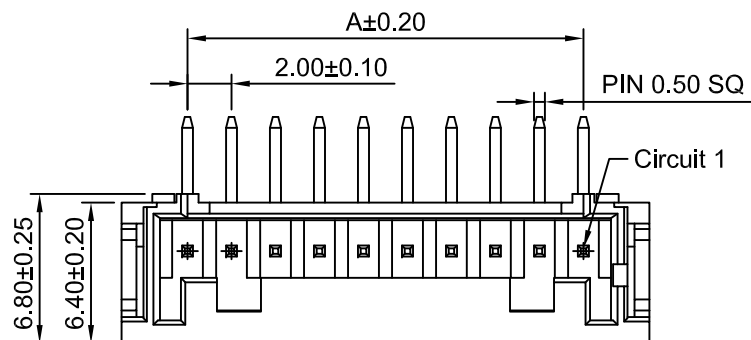


2P~8P

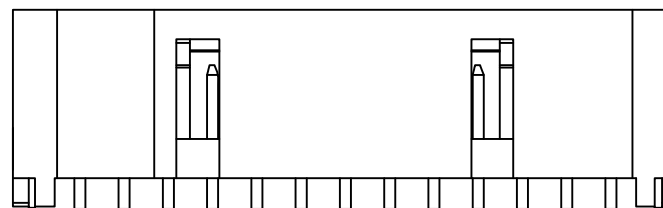

13P~15P

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Matte Tin over Nickel



Material: Nylon 9T UL94V-0(Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions (mm)	
	A	B
A2012WRE-2P	2.00	8.00
A2012WRE-3P	4.00	10.00
A2012WRE-4P	6.00	12.00
A2012WRE-5P	8.00	14.00
A2012WRE-6P	10.00	16.00
A2012WRE-7P	12.00	18.00
A2012WRE-8P	14.00	20.00
A2012WRE-9P	16.00	22.00
A2012WRE-10P	18.00	24.00
A2012WRE-11P	20.00	26.00
A2012WRE-12P	22.00	28.00
A2012WRE-13P	24.00	30.00
A2012WRE-14P	26.00	32.00
A2012WRE-15P	28.00	34.00

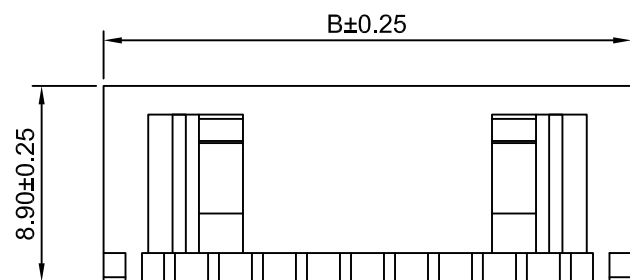

9P~12P

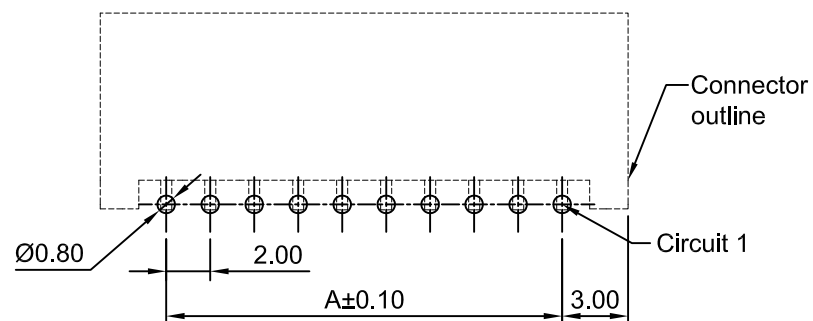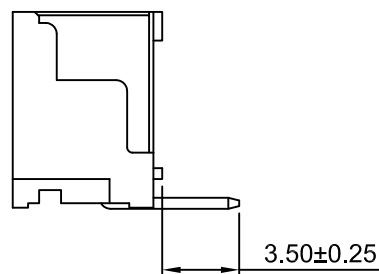

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.00mm PITCH RIGHT-ANGLE DIP HEADER	
DRAWN	CHKD	APPR		
Haisen Li	DianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2012WRE-XP	REV A0
x.x±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2021.11.02
REV	DESCRIPTION	DATE