
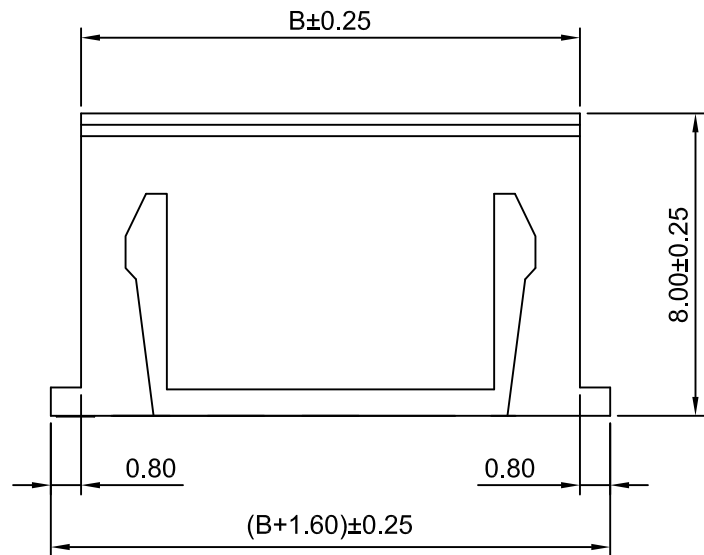


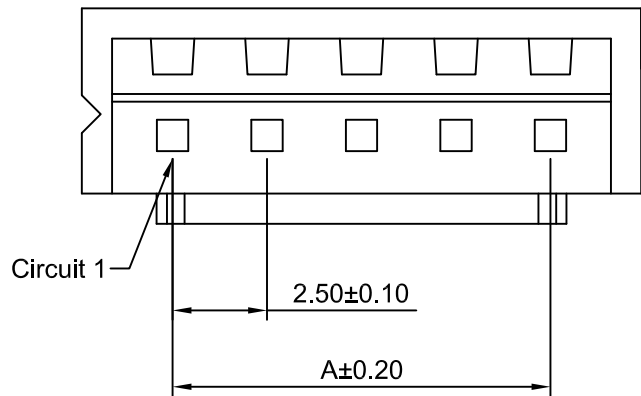

Ordering Information:

A2501H-XP - **
1 2

1.Part No.

2.Color:

(blank):White


BL:Blue

BK:Black

RD:Red

GN:Green

YL:Yellow

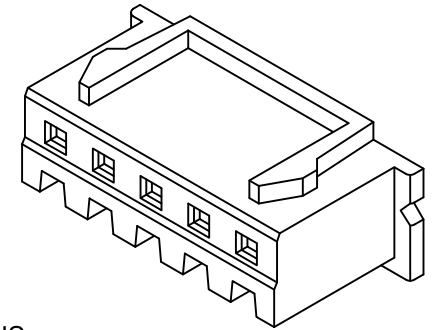

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	5.70	12P	27.50	30.70
3P	5.00	8.20	13P	30.00	33.20
4P	7.50	10.70	14P	32.50	35.70
5P	10.00	13.20	15P	35.00	38.20
6P	12.50	15.70	16P	37.50	40.70
7P	15.00	18.20	17P	40.00	43.20
8P	17.50	20.70	18P	42.50	45.70
9P	20.00	23.20	19P	45.00	48.20
10P	22.50	25.70	20P	47.50	50.70
11P	25.00	28.20			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.50mm Pitch		
mm		5:1		1 of 1				
Draw By:				Approved :				
Diankui Wan				Jack Yin				
General Tolerance						Housing		
7 0		x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT				
				DRAW NO : A2501H-XP				REV A1

			x.x±0.25	PROJECT
			x.xx±0.20	
			x.xxx±0.15	

