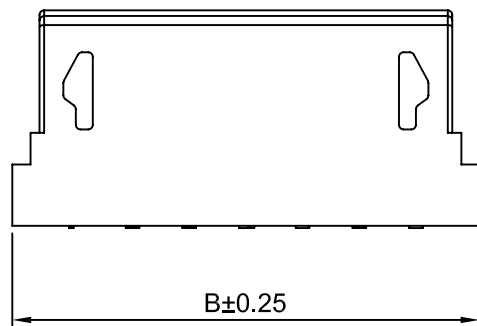
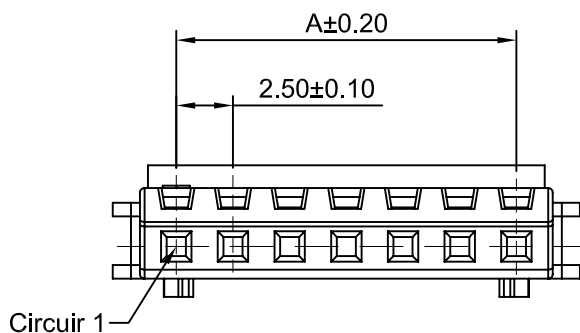


Ordering Information:

A2501HB-XP - ** - **
1 2 3

1.Part No.

2.Color:

(Blank):White

RD:Red

YL:Yellow

BL:Blue


BK:Black

GN:Green

3.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

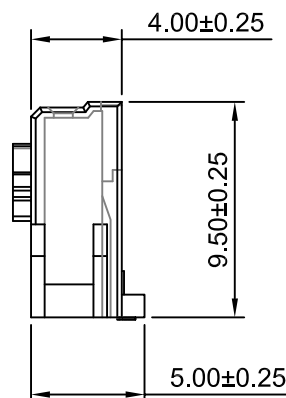

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon66, UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	8.10	9P	20.00	25.60
3P	5.00	10.60	10P	22.50	28.10
4P	7.50	13.10	11P	25.00	30.60
5P	10.00	15.60	12P	27.50	33.10
6P	12.50	18.10	13P	30.00	35.60
7P	15.00	20.60	14P	32.50	38.10
8P	17.50	23.10	15P	35.00	40.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	Title : 2.50mm PITCH	
mm	3:1	1 of 1		
Draw BY:		Approved :		Housing
Tony Su		Jack Yin		
General Tolerance				
x.x≤0.25 x.xx≤0.20 x.xxx≤0.15		ANGLE± 		DRAW NO : A2501HB-XP
REV		DESCRIPTION		REV A0
DATE				

A0	NEW RELEASE	2016.09.20
REV	DESCRIPTION	DATE