


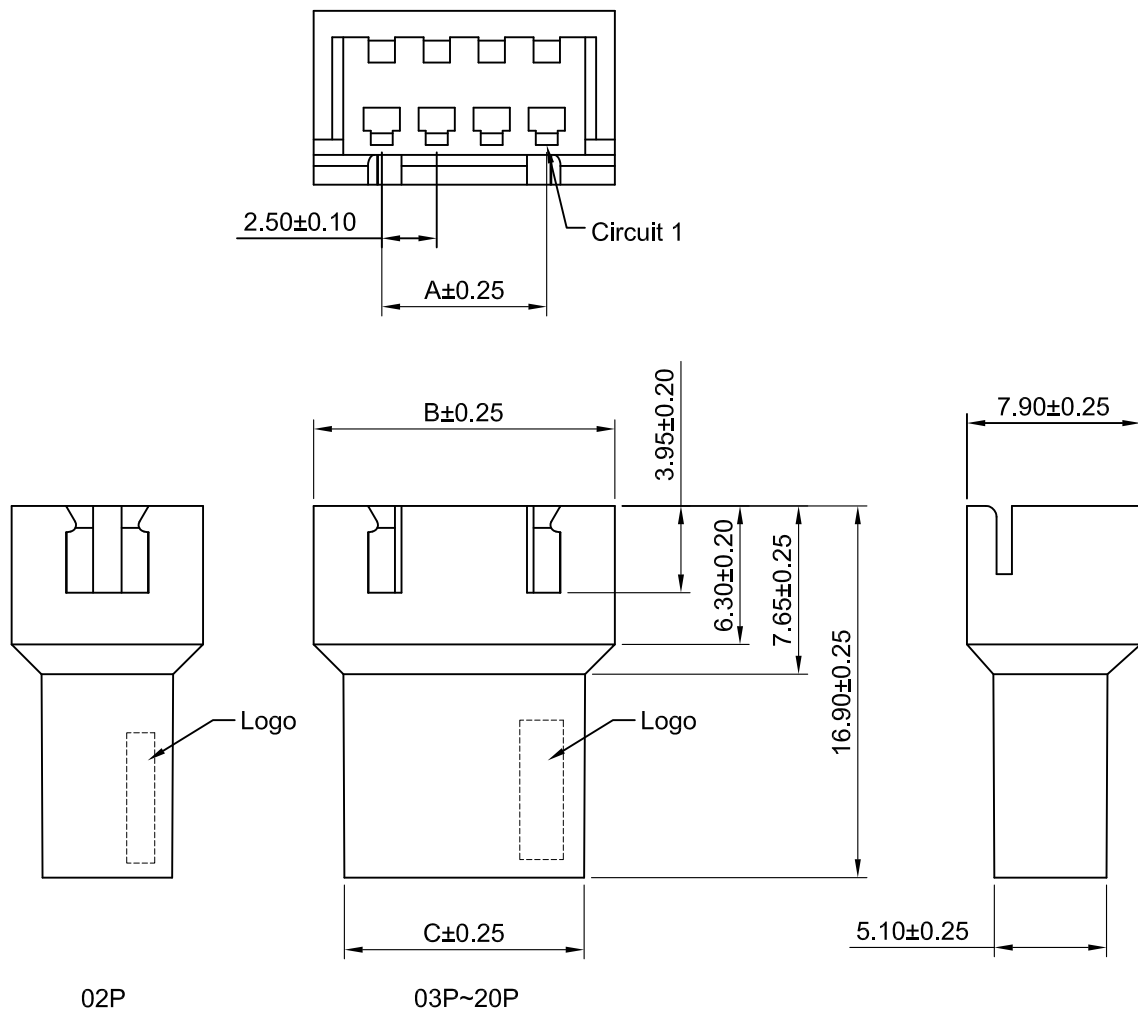

SPECIFICATIONS:

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact Resistance: $10\text{m}\Omega$ Max
 Insulation Resistance: $1000\text{M}\Omega$ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	8.70	5.90	12P	27.50	33.70	30.90
3P	5.00	11.20	8.40	13P	30.00	36.20	33.40
4P	7.50	13.70	10.90	14P	32.50	38.70	35.90
5P	10.00	16.20	13.40	15P	35.00	41.20	38.40
6P	12.50	18.70	15.90	16P	37.50	43.70	40.90
7P	15.00	21.20	18.40	17P	40.00	46.20	43.40
8P	17.50	23.70	20.90	18P	42.50	38.70	45.90
9P	20.00	26.20	23.40	19P	45.00	51.20	48.40
10P	22.50	28.70	25.90	20P	47.50	53.70	50.90
11P	25.00	31.20	28.40				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yln

Title :		2.50mm PITCH
		HOUSING
DRAW NO :		A2501HMB-XP
		REV A2

A2	Drawing revision	2016.05.01	General Tolerance	
A1	Modify the size	2016.04.01	x.xx $\leq$ 0.25	ANGLE $\pm$
A0	NEW RELEASE	2005.05.10	x.xx $\leq$ 0.20	
REV	DESCRIPTION	DATE	x.xxx $\leq$ 0.15	