
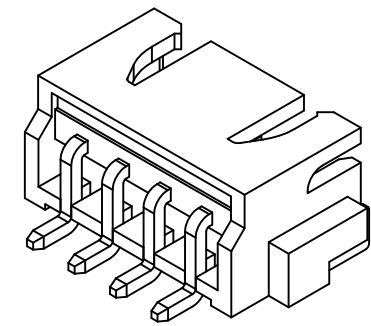
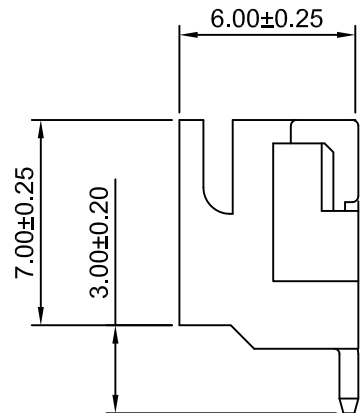
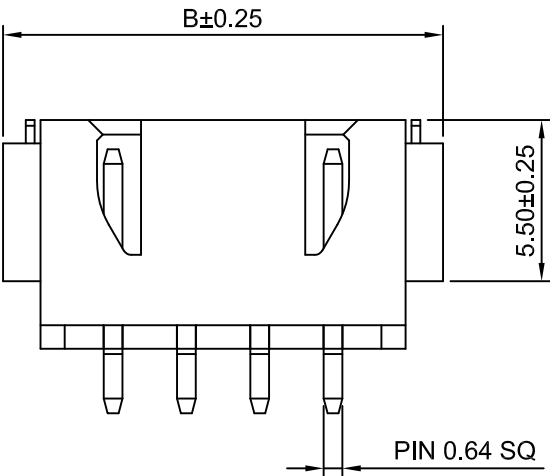


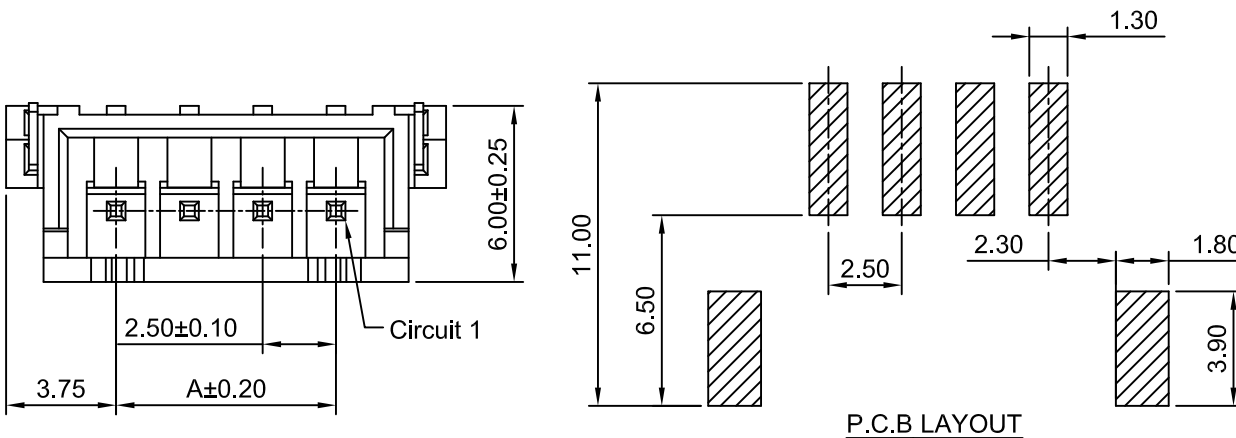

SPECIFICATIONS:
Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 6T,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	10.00	12P	27.50	35.00
3P	5.00	12.50	13P	30.00	37.50
4P	7.50	15.00	14P	32.50	40.00
5P	10.00	17.50	15P	35.00	42.50
6P	12.50	20.00	16P	37.50	45.00
7P	15.00	22.50	17P	40.00	47.50
8P	17.50	25.00	18P	42.50	50.00
9P	20.00	27.50	19P	45.00	52.50
10P	22.50	30.00	20P	47.50	55.00
11P	25.00	32.50			

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

			Unit	Scale	Sheet	TITLE 2.50mm PITCH 90° WAFER-SMT TYPE	
			mm	4:1	1 of 1		
			DRAWN	CHKD	APPR		
			Chengbiao Ye	Diankui Wan	Jack Yin		
			General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2501WR-S-XP	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°							
A1	CHANGE THE DRAWING		2023.07.07				
A0	NEW RELEASE		2005.05.10				
REV	DESCRIPTION	DATE					