
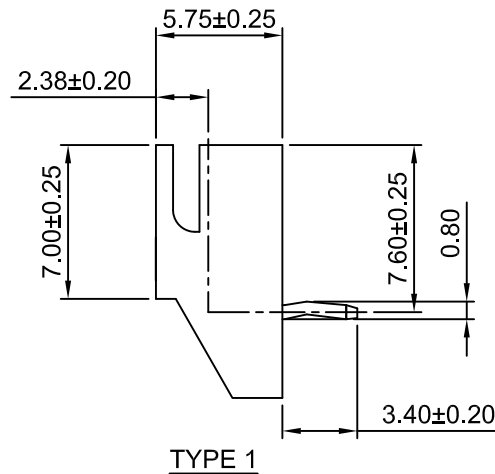


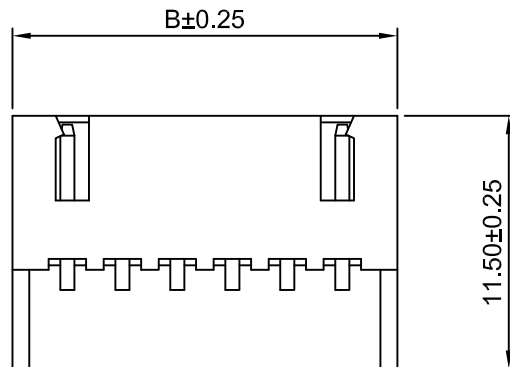


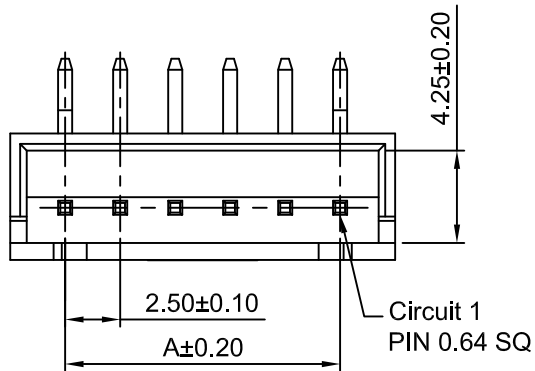

Ordering Information:

A2501WRB-XP - ** - ***
1 2 3

1.Part No.

2.Color:

(Blank):White

YL:Yellow

BK:Black

BL:Blue


RD:Red

GN:Green

3.Size D:

(Blank): 3.40mm

D22: 2.20mm

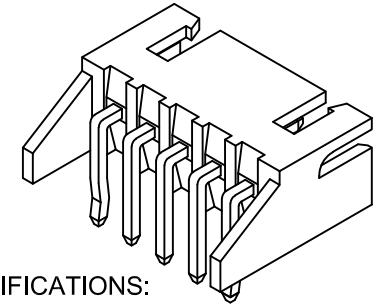

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2501WRB-2P	2.50	7.50
A2501WRB-3P	5.00	10.00
A2501WRB-4P	7.50	12.50
A2501WRB-5P	10.00	15.00
A2501WRB-6P	12.50	17.50
A2501WRB-7P	15.00	20.00
A2501WRB-8P	17.50	22.50
A2501WRB-9P	20.00	25.00
A2501WRB-10P	22.50	27.50
A2501WRB-11P	25.00	30.00
A2501WRB-12P	27.50	32.50
A2501WRB-13P	30.00	35.00
A2501WRB-14P	32.50	37.50
A2501WRB-15P	35.00	40.00
A2501WRB-16P	37.50	42.50
A2501WRB-17P	40.00	45.00
A2501WRB-18P	42.50	47.50
A2501WRB-19P	45.00	50.00
A2501WRB-20P	47.50	52.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHK'D	APPR	2.50mm PITCH RIGHT-ANGLE WAFER	
Wenmin Luo	DianKui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
A1	CHANGE THE DRAWING	2022.03.09	DRAWING NO. A2501WRB-XP	
A0	NEW RELEASE	2005.05.10		
REV	DESCRIPTION	DATE		
			REV A1	