


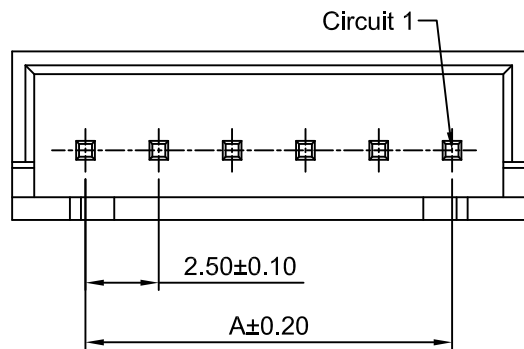





3P~20P

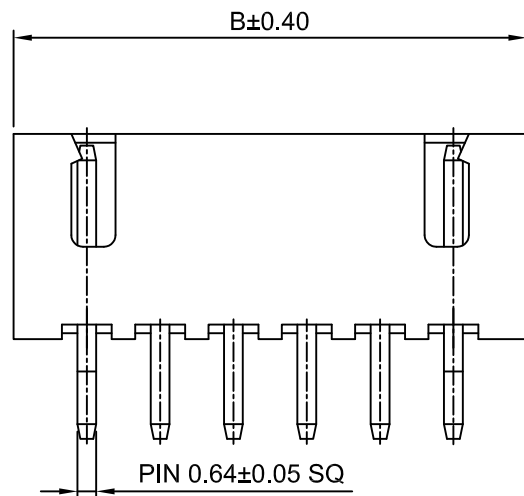


2P

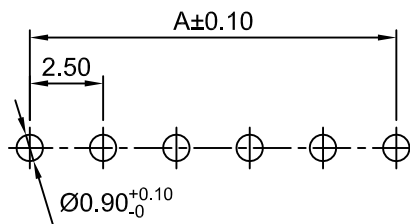

P.C.B LAYOUT
TOLERANCE:±0.05

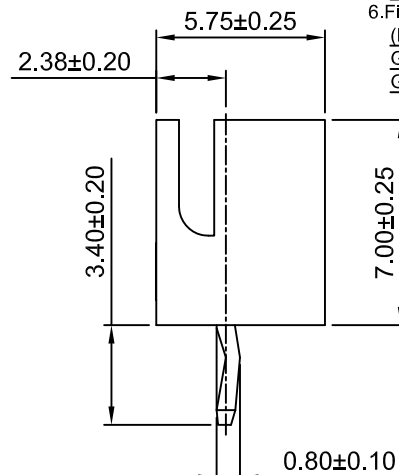

TYPE 1



TYPE 2

Ordering Information:
A2501WV-XP - * - *** - ** - ** - **
1 2 3 4 5 6

1.Part NO.

2.Style:

(Blank): Type 1

2: Type 2

3.Material:

(Blank): Nylon 66,UL94V-0 (White)

GF: Nylon 66 + Glass Fiber,UL94V-0 (White)

46: Nylon 46,UL94V-0 (Beige)

GWT: Nylon 66,UL94V-0 (Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

4.Halogen:

(Blank): Normal Material

HF: Halogen Free

5.Color:

YL: Yellow

BK: Black

BL: Blue

RD: Red


GN: Green

6.Finish:

(Blank): Tin over Nickel

G: Gold Flash (Au:1u")

G3: Gold Flash (Au:3u")

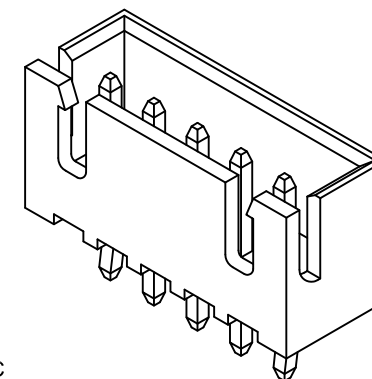

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.50	12P	27.50	32.50
3P	5.00	10.00	13P	30.00	35.00
4P	7.50	12.50	14P	32.50	37.50
5P	10.00	15.00	15P	35.00	40.00
6P	12.50	17.50	16P	37.50	42.50
7P	15.00	20.00	17P	40.00	45.00
8P	17.50	22.50	18P	42.50	47.50
9P	20.00	25.00	19P	45.00	50.00
10P	22.50	27.50	20P	47.50	52.50
11P	25.00	30.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

	Unit	Scale	Sheet	TITLE	
	mm	3:1	1 of 1		
8	DRWN	CHK'D	APPR		
7	Chengbiao Ye	Diankui Wan	Jack Yin	2.50mm PITCH 180° WAFER	
4	General Tolerances		THIRD ANGLE PROJECTION		
1	x,x±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°			DRAWING NO.	REV A4
0					
	A2501WV-XP				