

Ordering Information:

A2501WVR-XP - ** - ***

1 2 3

1.Part NO.

2.Style:

(Blank)-Type 1

2-Type 2



3.Material:

(Blank): Nylon 66,UL94V-0(White)



GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

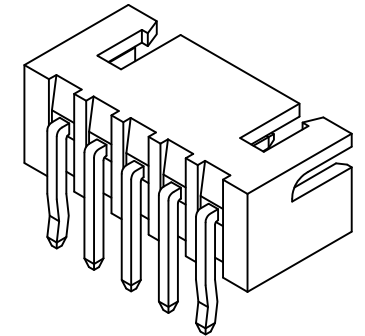

P.C.B LAYOUT

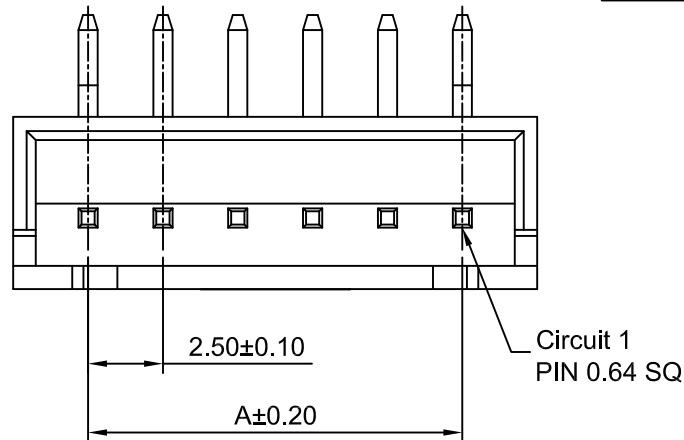

TYPE 2

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max



Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.50	12P	27.50	32.50
3P	5.00	10.00	13P	30.00	35.00
4P	7.50	12.50	14P	32.50	37.50
5P	10.00	15.00	15P	35.00	40.00
6P	12.50	17.50	16P	37.50	42.50
7P	15.50	20.00	17P	40.00	45.00
8P	17.50	22.50	18P	42.50	47.50
9P	20.00	25.00	19P	45.00	50.00
10P	22.50	27.50	20P	47.50	52.50
11P	25.00	30.00			

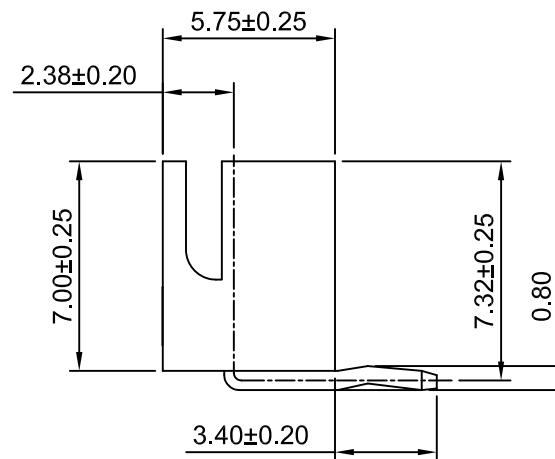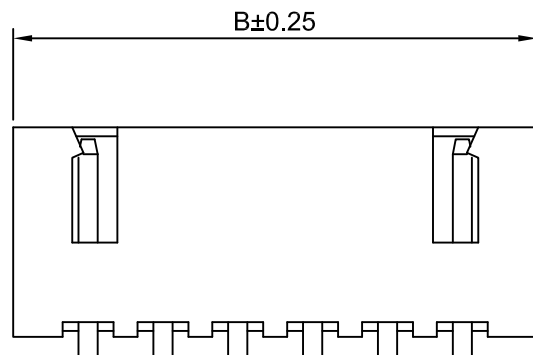

TYPE 1

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
DRAWN	CHK'D	APPR
Haisen Li	Diankui Wan	Jack Yin

TITLE	
5.00mm PITCH RIGHT-ANGLE WAFER	
DRAWING NO.	REV
A2501WVR-XP	A1

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2022.08.10
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

General Tolerances	THIRD ANGLE PROJECTION
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°	