
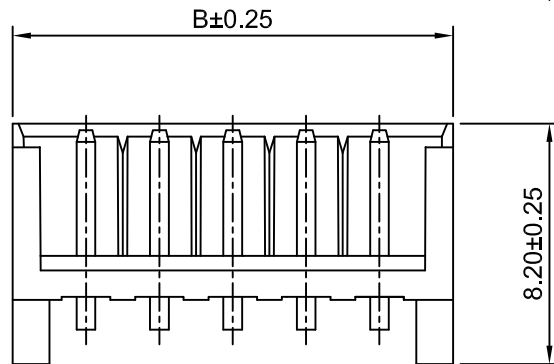
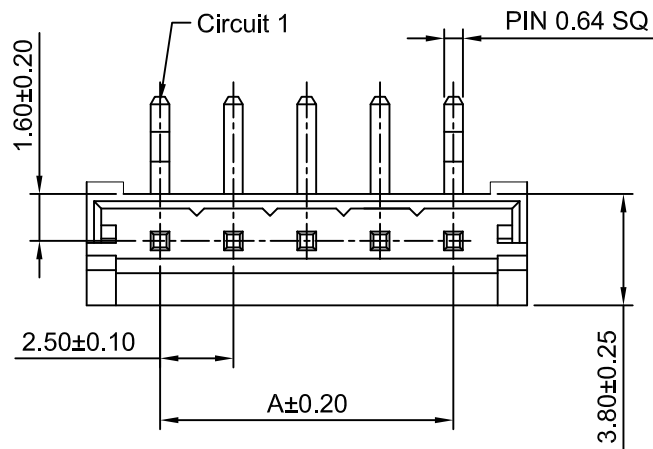


P.C.B LAYOUT
TOLERANCE:±0.05

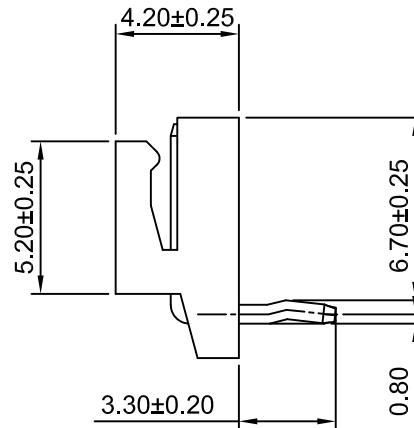

Ordering Information:

A2502WR-XP - *** - ** - *
1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 Material

RD: Red YL: Yellow

BL: Blue BK: Black

GN: Green

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2502WR-2P	2.50	7.50
A2502WR-3P	5.00	10.00
A2502WR-4P	7.50	12.50
A2502WR-5P	10.00	15.00
A2502WR-6P	12.50	17.50
A2502WR-7P	15.00	20.00
A2502WR-8P	17.50	22.50
A2502WR-9P	20.00	25.00
A2502WR-10P	22.50	27.50
A2502WR-11P	25.00	30.00
A2502WR-12P	27.50	32.50
A2502WR-13P	30.00	35.00
A2502WR-14P	32.50	37.50
A2502WR-15P	35.00	40.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
DRWN	CHK'D	APPR
Wenmin Luo	Diankui Wan	Jack Yin

TITLE	
2.50mm PITCH RIGHT ANGLE HEADER	

A2	CHANGE THE DRAWING	2021.12.03
A1	CHANGE THE DRAWING	2019.01.14
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE

General Tolerances	THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°	

DRAWING NO.	REV
A2502WR-XP	A2