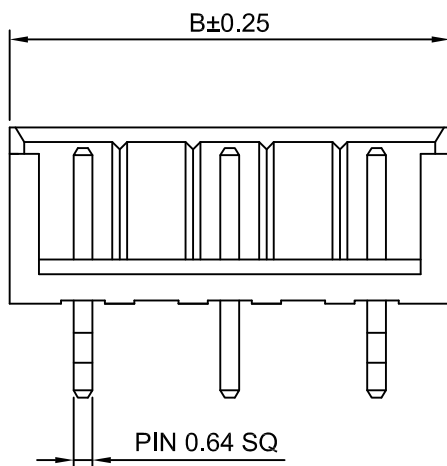
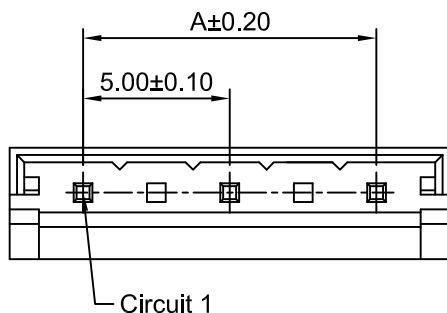


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A2502WV-XP-A - ^{***}/₁ - ^{**}/₂ - ^{**}/₃ - ^{**}/₄

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 Material

RD: Red YL: Yellow


BL: Blue BK: Black

GN: Green

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

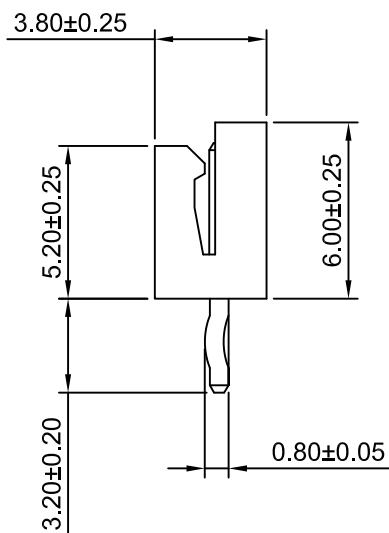

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2502WV-3P-A	5.00	10.00
A2502WV-5P-A	10.00	15.00
A2502WV-7P-A	15.00	20.00
A2502WV-9P-A	20.00	25.00
A2502WV-11P-A	25.00	30.00
A2502WV-13P-A	30.00	35.00
A2502WV-15P-A	35.00	40.00

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1			
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin	5.00mm PITCH VERTICAL HEADER		
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.	
x.xx±0.25					
x.xx±0.20					
x.xxx±0.15				REV A0	
ANGLES ±1°					
		A2502WV-XP-A			