
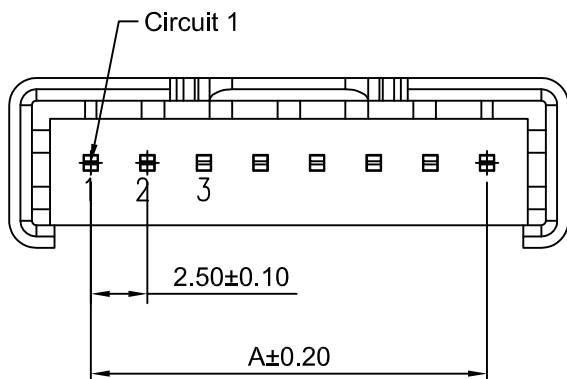
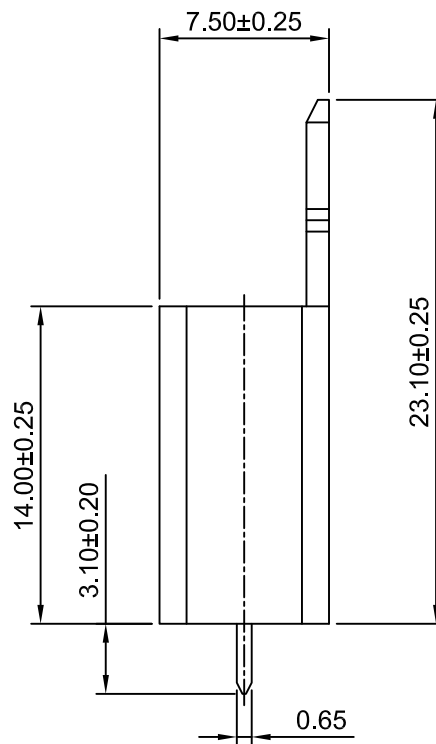


P.C.B LAYOUT

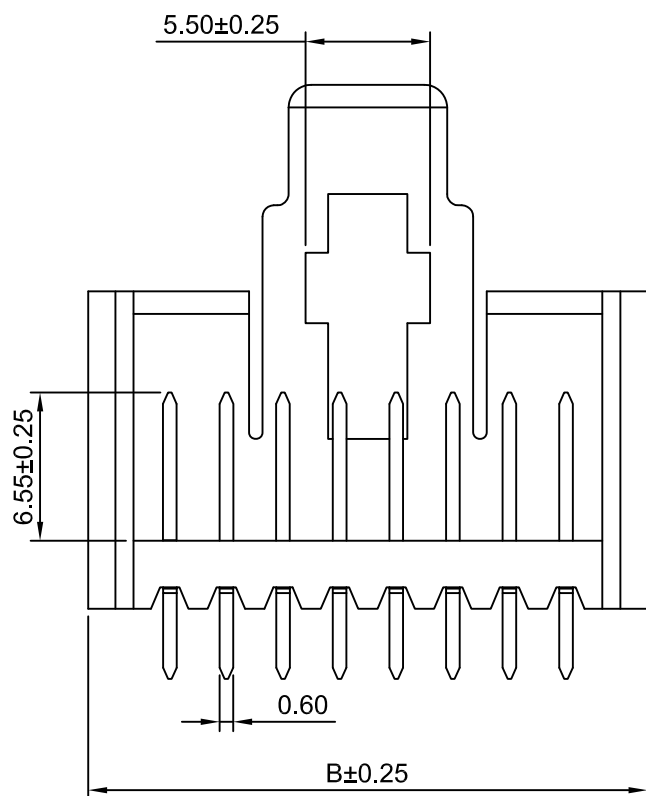

Ordering Information:

A2502WVA-XP - *** - *** - ***
1 2 3 4

1.Part No.

2.Material:

(blank) - PBT+30%GF,UL94V-0

GWT - PBT+30%GF,UL94V-0,GWT 750℃

3.Color:

(blank) - Gray

BK - Black

RD - Red

BL - Blue

4.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel

SPECIFICATIONS:

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40℃ ~ +105℃

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: PBT+30%GF,UL94V-0(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
4P	7.50	14.70	13P	30.00	37.20
5P	10.00	17.20	14P	32.50	39.70
6P	12.50	19.70	15P	35.00	42.20
7P	15.00	22.20	16P	37.50	44.70
8P	17.50	24.70	17P	40.00	47.20
9P	20.00	27.20	18P	42.50	49.70
10P	22.50	29.70	19P	45.00	52.20
11P	25.00	32.20	20P	47.50	54.70
12P	27.50	34.70			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

Title :

2.50mm Pitch

180° Wafer

DRAW NO : A2502WVA-XP

REV
A2

A2	CHANGE THE INFORMATION	2019.11.13
A1	CHANGE THE DRAWING	2018.11.23
A0	NEW RELEASE	2017.09.15
REV	DESCRIPTION	DATE

General Tolerance	PROJECT
x.x±0.25 x.xx±0.20 x.xxx±0.15	