


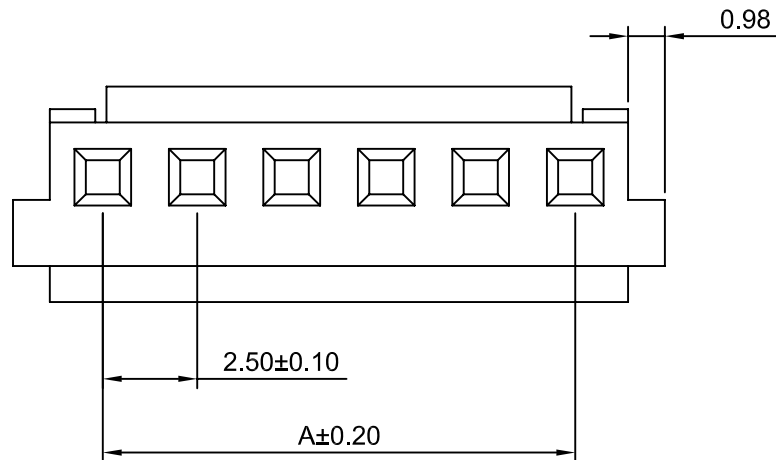

Ordering Information:

A2503HA-XP - ***
1 2

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT :Nylon 66,UL94V-0 GWT 750 °C

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max



Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	5.30	12P	27.50	30.30
3P	5.00	7.80	13P	30.00	32.80
4P	7.50	10.30	14P	32.50	35.30
5P	10.00	12.80	15P	35.00	37.80
6P	12.50	15.30	16P	37.50	40.30
7P	15.00	17.80	17P	40.00	42.80
8P	17.50	20.30	18P	42.50	45.30
9P	20.00	22.80	19P	45.00	47.80
10P	22.50	25.30	20P	47.50	50.30
11P	25.00	27.80			

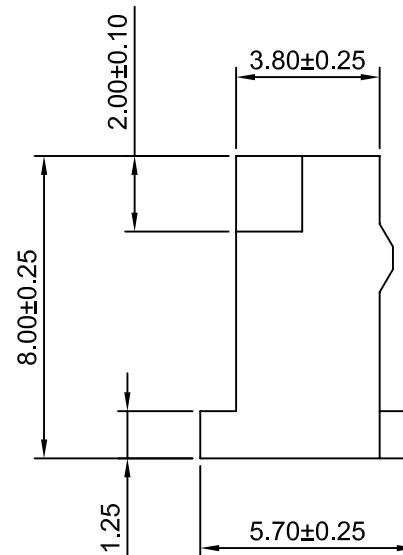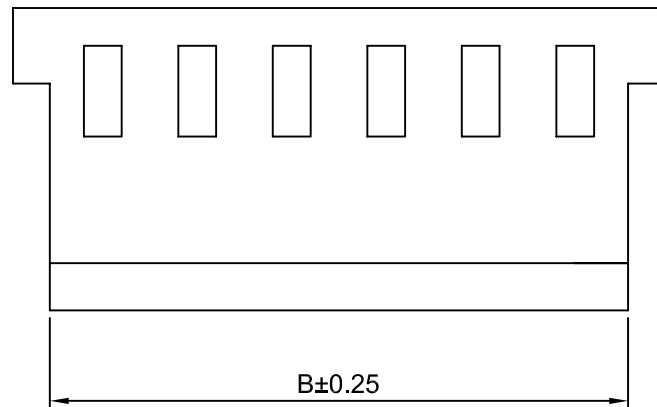

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yin

General Tolerance

x.x≤0.25	ANGLE±
x.xx≤0.20	
x.xxx≤0.15	

Title :		2.50mm PITCH	
		Housing	
DRAW NO :	A2503HA-XP	REV	A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.07.01