
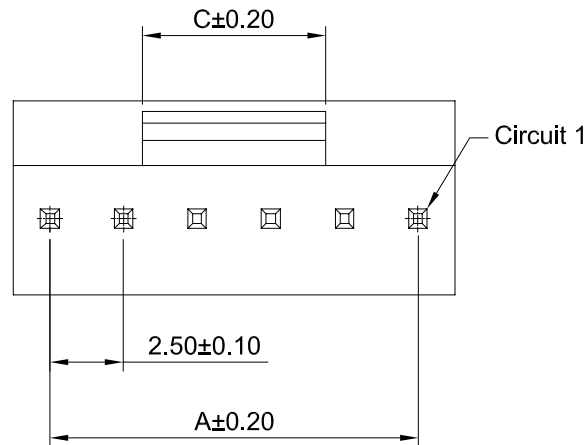
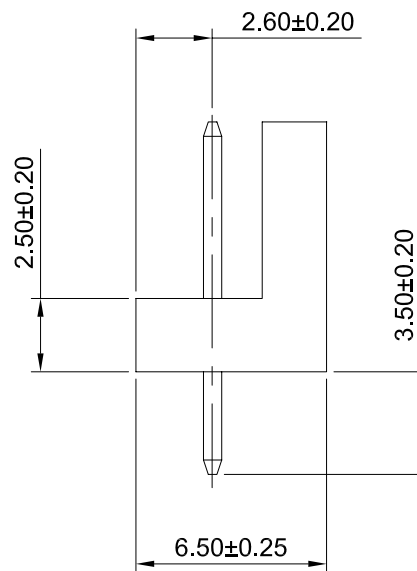
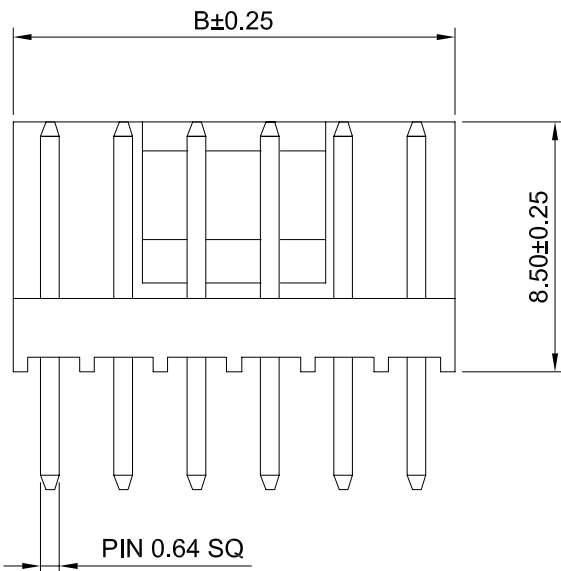


P.C.B LAYOUT



SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Pink)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	5.00	2.20	9P	20.00	22.50	10.20
3P	5.00	7.50	3.20	10P	22.50	25.00	10.20
4P	7.50	10.00	5.20	11P	25.00	27.50	11.20
5P	10.00	12.50	5.20	12P	27.50	30.00	11.20
6P	12.50	15.00	6.20	13P	30.00	32.50	13.20
7P	15.00	17.50	8.20	14P	32.50	35.00	13.20
8P	17.50	20.00	10.20	15P	35.00	37.50	13.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :
2.50mm PITCH
180° WAFER

			General Tolerance		DRAW NO : A2506WV-XP	REV A0
A0	NEW RELEASE	2005.05.10	x.x±0.25	ANGLE±		
REV	DESCRIPTION	DATE	x.xx±0.20			
			x.xxx±0.15			