




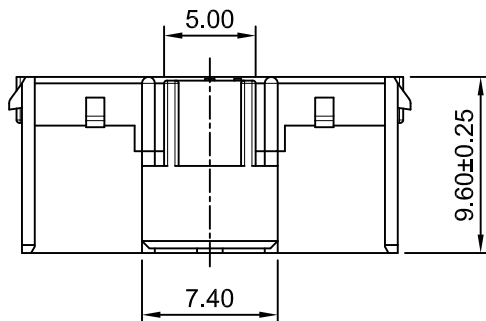


8P~15P







2P




3P



4P~7P

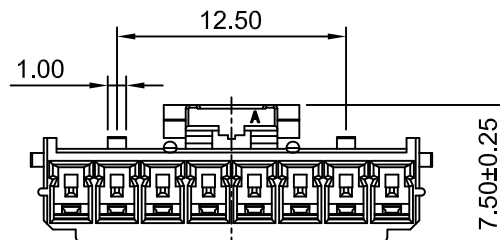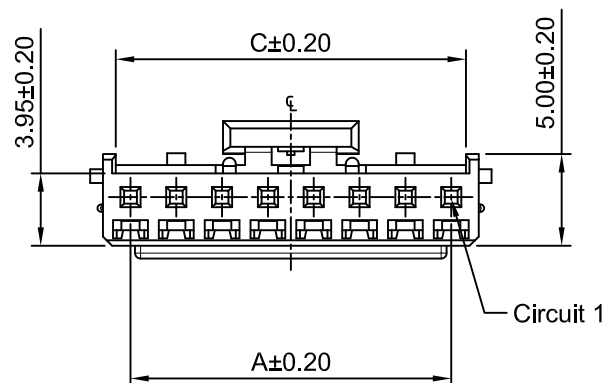

2P

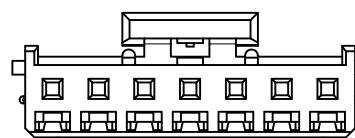

3P~7P

Ordering Information:

A2508HC-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank):see section 2 material

RD: Red

SPECIFICATIONS:

Current Rating: 5A AC,DC (Max.)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2508HC-2P	2.50	5.50	4.10
A2508HC-3P	5.00	8.00	6.60
A2508HC-4P	7.50	10.50	9.10
A2508HC-5P	10.00	13.00	11.60
A2508HC-6P	12.50	15.50	14.10
A2508HC-7P	15.00	18.00	16.60
A2508HC-8P	17.50	20.50	19.10
A2508HC-9P	20.00	23.00	21.60
A2508HC-10P	22.50	25.50	24.10
A2508HC-11P	25.00	28.00	26.60
A2508HC-12P	27.50	30.50	29.10
A2508HC-13P	30.00	33.00	31.60
A2508HC-14P	32.50	35.50	34.10
A2508HC-15P	35.00	38.00	36.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A5	CHANGE THE DRAWING	2023.03.01
A4	CHANGE THE DRAWING	2023.01.12
A3	MODIFY DRAWING	2022.11.15
A2	CHANGE THE DRAWING	2022.07.20
A1	CHANGE THE DRAWING	2021.03.02
A0	NEW RELEASE	2020.06.10
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	2.5:1	1 of 1
DRAWN	CHK'D	APPR
Chengbiao Ye	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25		
x.xx±0.20		
x.xxx±0.15		
ANGLES ±1°		

TITLE		2.50mm PITCH HOUSING	DRAWING NO. A2508HC-XP	REV A5