


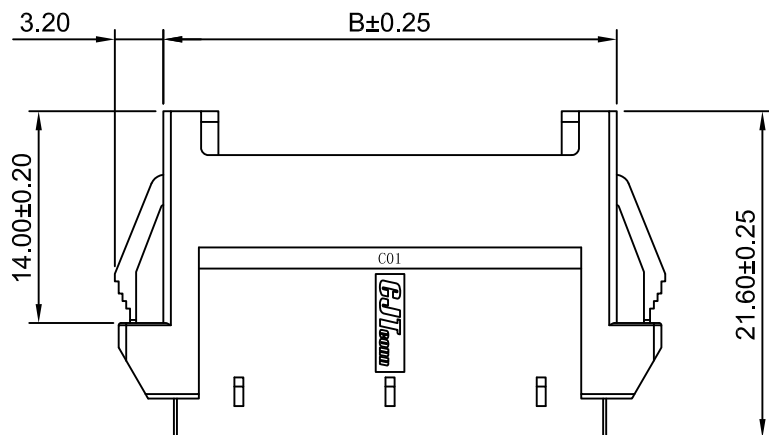
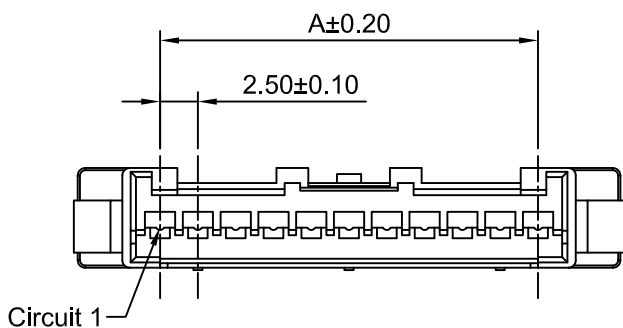




9P~15P

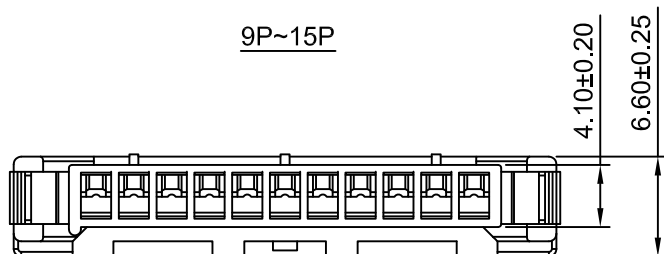

2P~5P

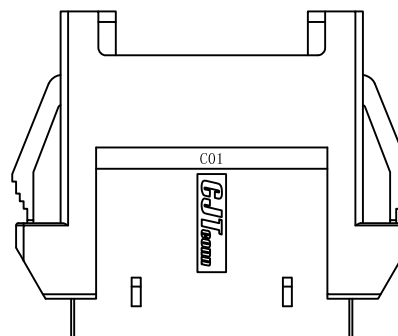

6P~8P

Ordering Information:

A2508HM-XP - ***

1 2

1.Part NO.

2.Color:

(Blank): White

BL: Blue

RD: Red

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508HM-2P	2.50	7.50
A2508HM-3P	5.00	10.00
A2508HM-4P	7.50	12.50
A2508HM-5P	10.00	15.00
A2508HM-6P	12.50	17.50
A2508HM-7P	15.00	20.00
A2508HM-8P	17.50	22.50
A2508HM-9P	20.00	25.00
A2508HM-10P	22.50	27.50
A2508HM-11P	25.00	30.00
A2508HM-12P	27.50	32.50
A2508HM-13P	30.00	35.00
A2508HM-14P	32.50	37.50
A2508HM-15P	35.00	40.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	2.50mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2508HM-XP	A0
A0	NEW RELEASE			
REV	DESCRIPTION	DATE		