

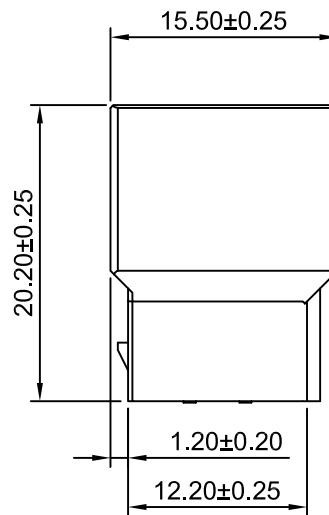
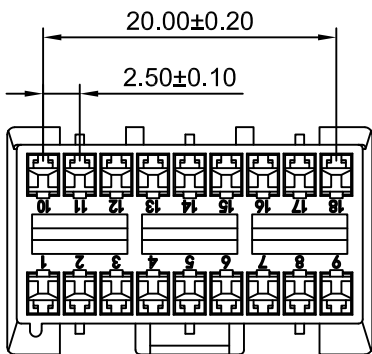
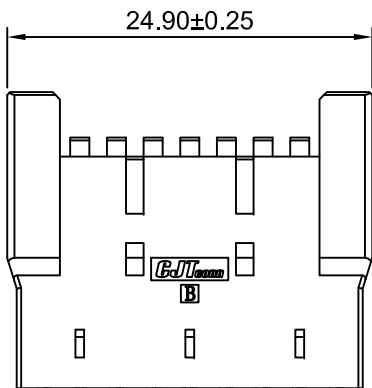


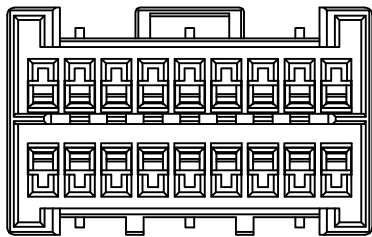

Ordering Information:

A2508HMC-2x9P - ** - **
1 2 3

1.Part No.

2.Material:

(Blank);Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0 ,IEC 60335-1,5th
Edition Glow Wire Capable.

3.Color:

(Blank) :White

BK:Black

RD :Red

BL :Blue

YL :Yellow

GN :Green

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	2.50mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			A2508HMC-2x9P	A0

A0	NEW RELEASE	2021.09.25
REV	DESCRIPTION	DATE