


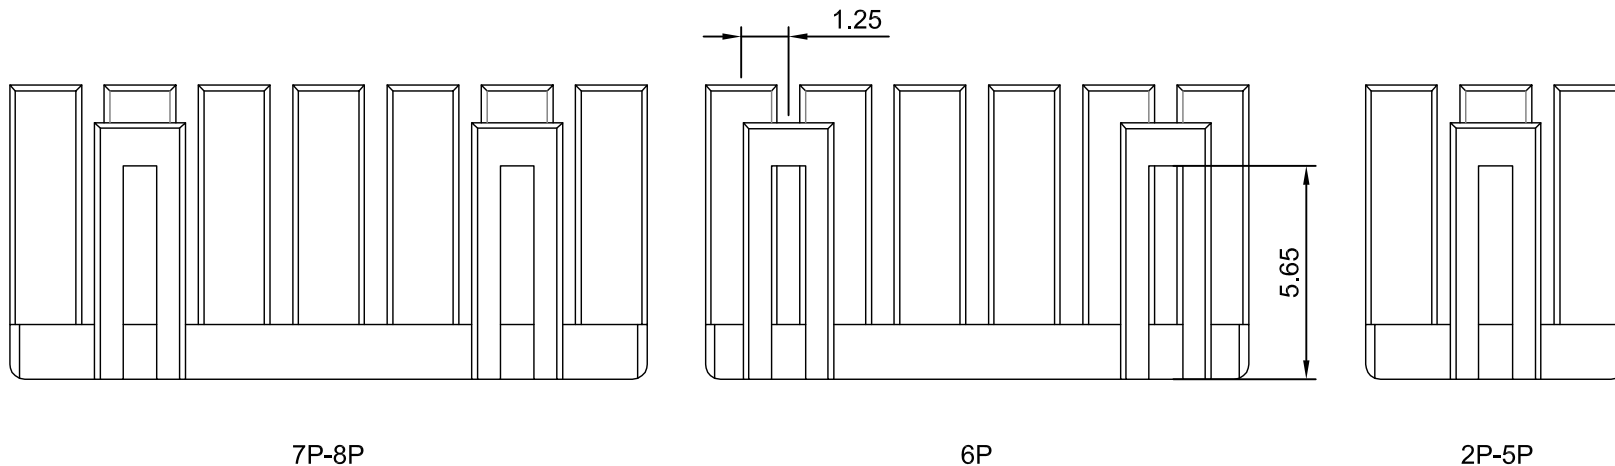

Ordering Information:

A2508SB-XP - ***
1 2

1.Part NO.

2.Color:

(Blank): Natural

BK: Black

SPECIFICATIONS:

Current Rating: 3A AC,DC (Max.)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.




Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66+15%GF,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508SB-2P	2.50	4.40
A2508SB-3P	5.00	6.90
A2508SB-4P	7.50	9.40
A2508SB-5P	10.00	11.90
A2508SB-6P	12.50	14.40
A2508SB-7P	15.00	16.90
A2508SB-8P	17.50	19.40
A2508SB-9P	20.00	21.90
A2508SB-10P	22.50	24.40
A2508SB-11P	25.00	26.90
A2508SB-12P	27.50	29.40
A2508SB-13P	30.00	31.90
A2508SB-14P	32.50	34.40
A2508SB-15P	35.00	36.90
A2508SB-18P	37.50	39.40

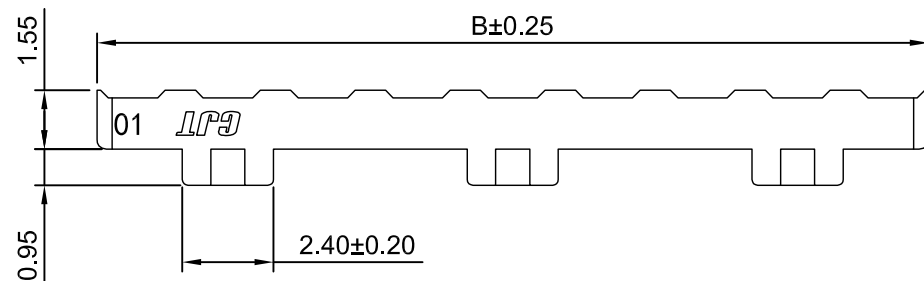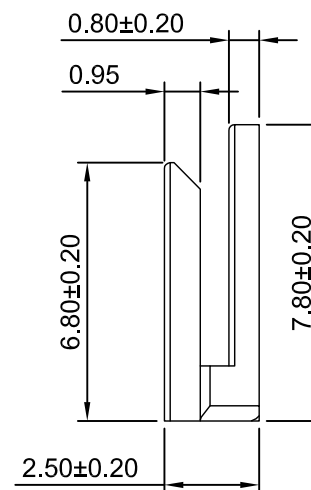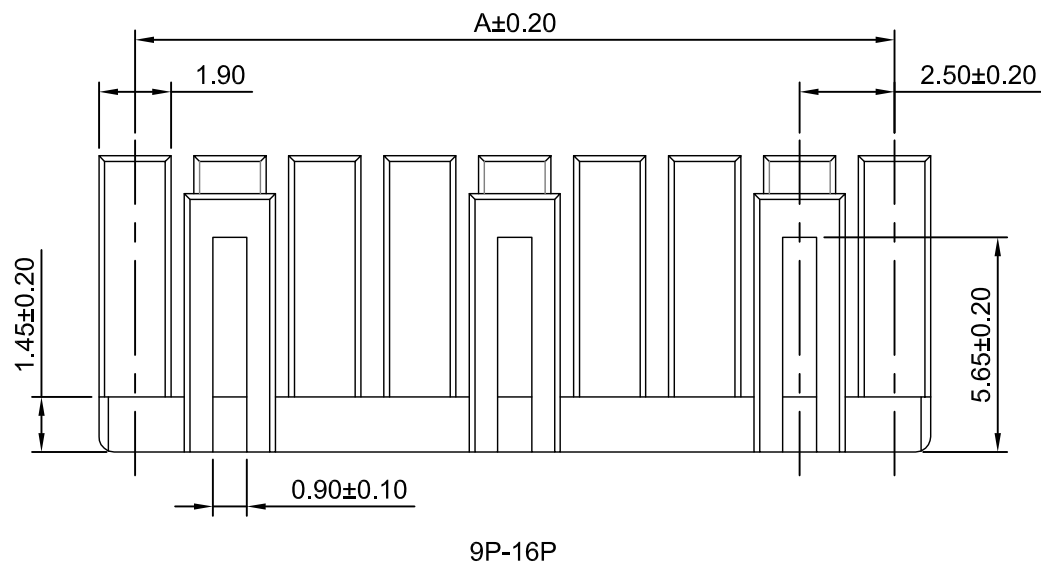

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2022.09.16
A0	NEW RELEASE	2021.02.01

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	
DRAWN	CHK'D	APPR	2.50mm PITCH TPA
Halsen Li	Dlankut Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
			A2508SB-XP
			REV A1