



2P



3P



4P

Ordering Information:

A2508WRC-XP - ** - *
1 2 3

1.Part NO.

2.Color:

(Blank): Beige

RD: Red

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 5A AC,DC (Max.)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 1000V AC/minute

Pin Material: Brass


Material: Nylon 9T,UL94V-0

Ordering Information & Dimensions


Part NO.	Dimensions(mm)			
	A	B	C	D
A2508WRC-2P	2.50	7.40	3.90	5.70
A2508WRC-3P	5.00	9.90	6.40	8.20
A2508WRC-4P	7.50	12.40	8.90	10.70
A2508WRC-5P	10.00	14.90	11.40	13.20
A2508WRC-6P	12.50	17.40	13.90	15.70
A2508WRC-7P	15.00	19.90	16.40	18.20
A2508WRC-8P	17.50	22.40	18.90	20.70
A2508WRC-9P	20.00	24.90	21.40	23.20
A2508WRC-10P	22.50	27.40	23.90	25.70
A2508WRC-11P	25.00	29.90	26.40	28.20
A2508WRC-12P	27.50	32.40	28.90	30.70
A2508WRC-13P	30.00	34.90	31.40	33.20
A2508WRC-14P	32.50	37.40	33.90	35.70
A2508WRC-15P	35.00	39.90	36.40	38.20

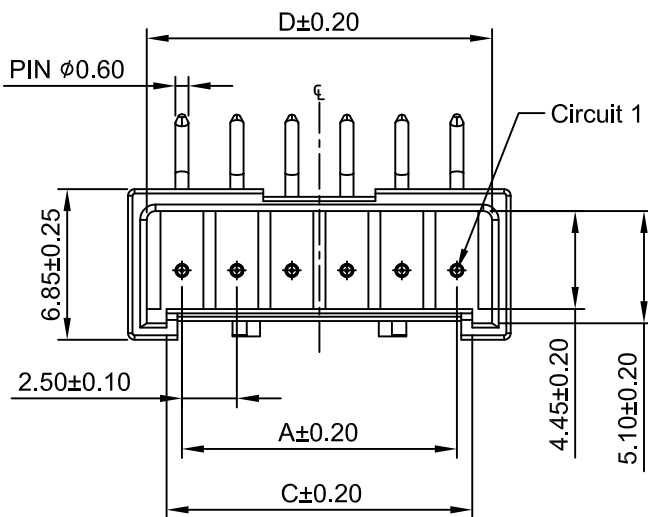


5P~15P

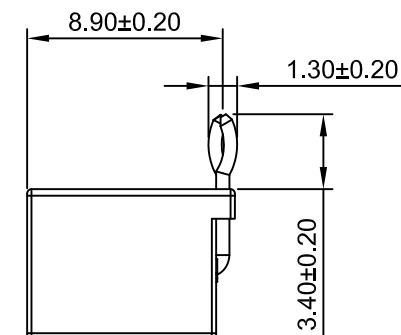

2P

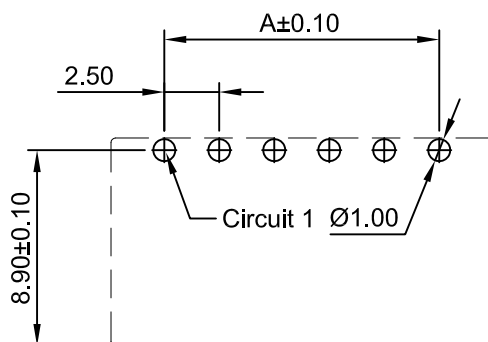

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

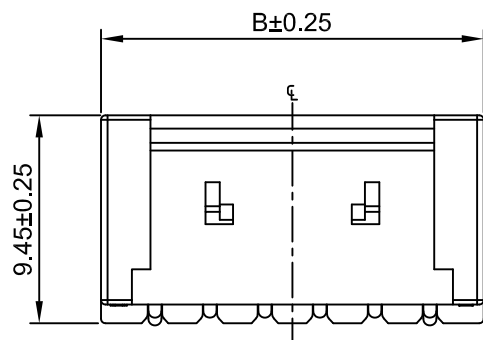

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.50mm PITCH 90° DIP WAFER	
DRWN	CHKD	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.x±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2508WRC-XP	A2

A2	CHANGE THE DRAWING	2023.03.14
A1	CHANGE THE DRAWING	2021.03.02
A0	NEW RELEASE	2020.06.10
REV	DESCRIPTION	DATE