
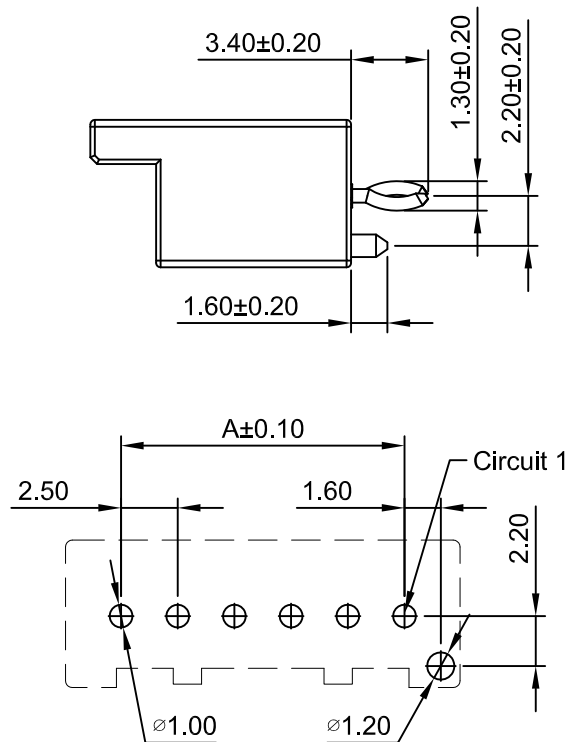
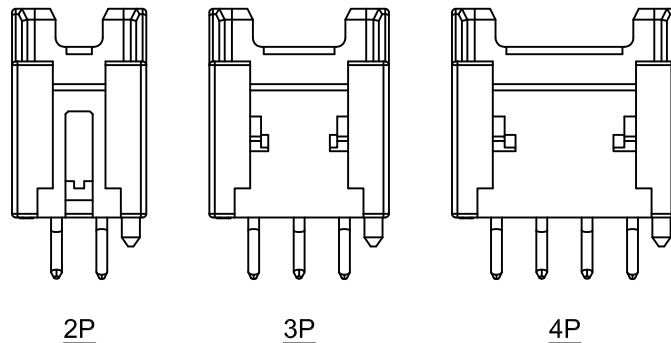


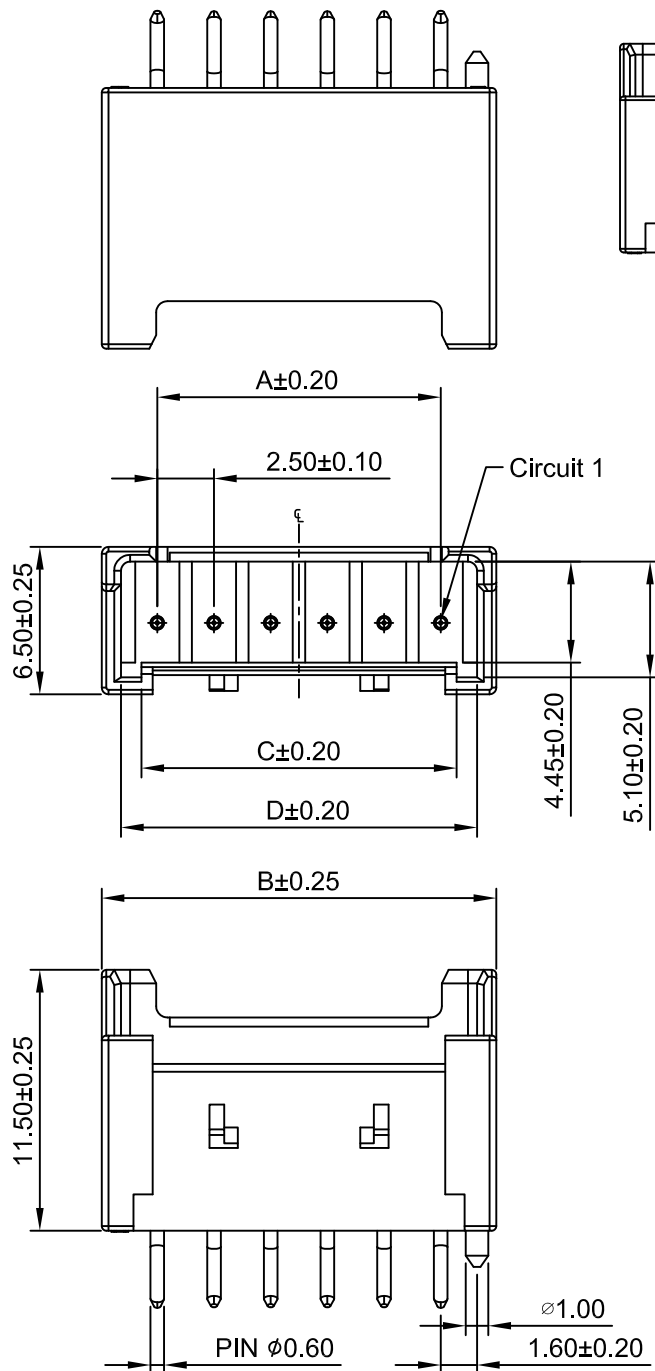

Ordering Information:

A2508WVC-F-XP - ** - *

1. Part NO.

2. Color:

(Blank): Beige

BK: Black BL: Blue

RD: Red YL: Yellow

3. Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 5A AC, DC (Max.)

Voltage Rating: 250V AC, DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $20\text{m}\Omega$ Max.

Insulation Resistance: $1000\text{M}\Omega$ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: Nylon 9T, UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2508WVC-F-2P	2.50	7.40	3.90	5.70
A2508WVC-F-3P	5.00	9.90	6.40	8.20
A2508WVC-F-4P	7.50	12.40	8.90	10.70
A2508WVC-F-5P	10.00	14.90	11.40	13.20
A2508WVC-F-6P	12.50	17.40	13.90	15.70
A2508WVC-F-7P	15.00	19.90	16.40	18.20
A2508WVC-F-8P	17.50	22.40	18.90	20.70
A2508WVC-F-9P	20.00	24.90	21.40	23.20
A2508WVC-F-10P	22.50	27.40	23.90	25.70
A2508WVC-F-11P	25.00	29.90	26.40	28.20
A2508WVC-F-12P	27.50	32.40	28.90	30.70
A2508WVC-F-13P	30.00	34.90	31.40	33.20
A2508WVC-F-14P	32.50	37.40	33.90	35.70
A2508WVC-F-15P	35.00	39.90	36.40	38.20

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHK'D	APPR	2.50mm PITCH 180° DIP WAFER	
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x, x±0.25 x, x±0.20 x, x±0.15 ANGLES ±1°				
		A2508WVC-F-XP		REV A1