
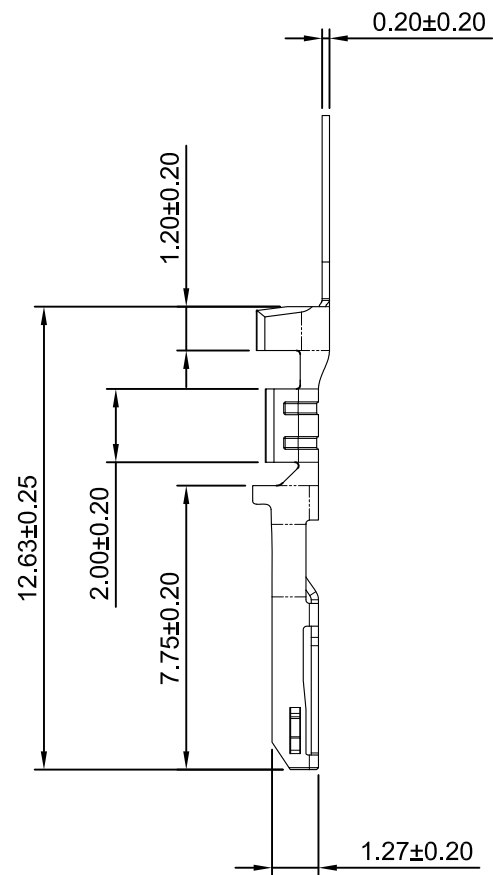
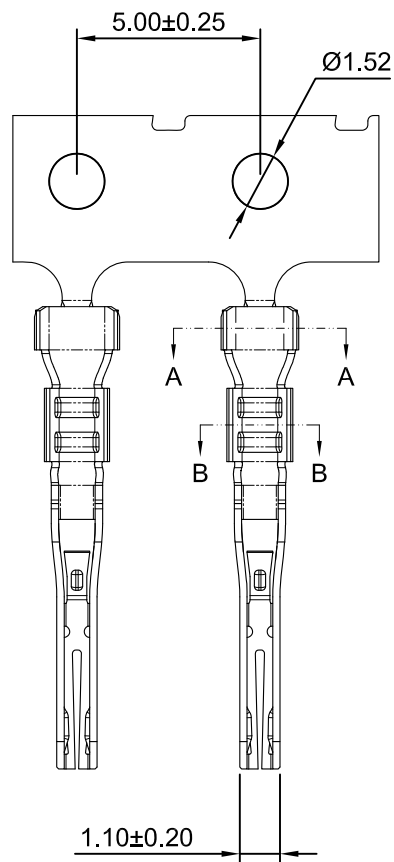


SEC:A-A



SEC:B-B

Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2509-TP-B-L	AWG#24-#26	1.30mm(max)	Phosphor Bronze	Tin over Nickel	15,000 PCS
A2509-GP-B-L	AWG#24-#26	1.30mm(max)	Phosphor Bronze	Gold over Nickel	15,000 PCS
A2509-TCA-B-L	AWG#24-#26	1.30mm(max)	High conductive copper alloy	Tin over Nickel	15,000 PCS
A2509-GCA-B-L	AWG#24-#26	1.30mm(max)	High conductive copper alloy	Gold over Nickel	15,000 PCS

A2	CHANGE THE DRAWING	2021.11.18
A1	CHANGE THE DRAWING	2021.08.25
A0	NEW RELEASE	2019.05.30
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 2.50mm PITCH CRIMP TERMINAL	
mm	5:1	1 of 1		
DRAWN	CHK'D	APPR		
WenMin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A2
x.xx±0.25				
x.xx±0.20				
x.xx±0.15			A2509-T-B-L	
ANGLES ±1°				