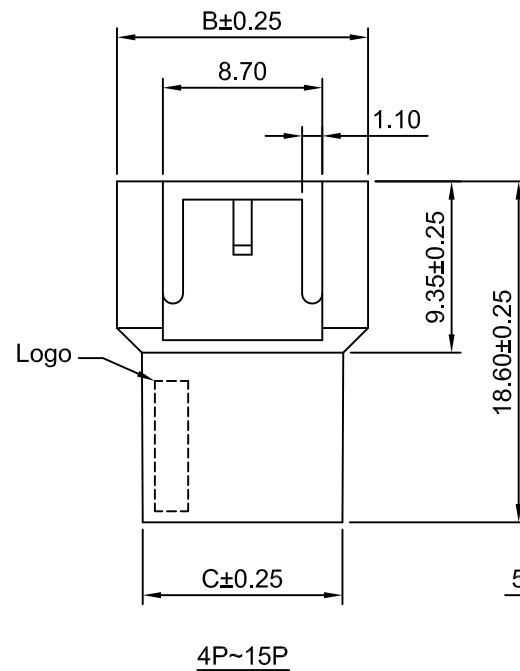
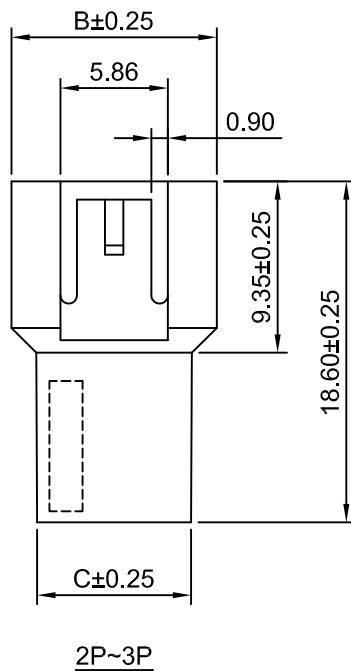
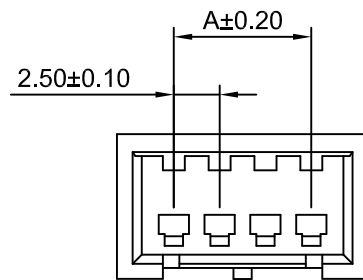
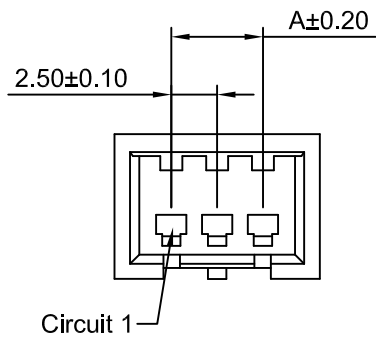


Ordering Information:

A2509HMA-XP - ^{**}/₂ - ^{***}/₃

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)


GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,
5th Edition Glow Wire Capable.

3.Color:

(Blank): see section 2 Material

BK: Black BL: Blue

RD: Red YL: Yellow



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage:1000VAC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	8.70	5.90	9P	20.00	26.20	23.40
3P	5.00	11.20	8.40	10P	22.50	28.70	25.90
4P	7.50	13.70	10.90	11P	25.00	31.20	28.40
5P	10.00	16.20	13.40	12P	27.50	33.70	30.90
6P	12.50	18.70	15.90	13P	30.00	36.20	33.40
7P	15.00	21.20	18.40	14P	32.50	38.70	35.90
8P	17.50	23.70	20.90	15P	35.00	41.20	38.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1		
DRWN	CHKD	APPR	2.50mm PITCH HOUSING	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
A1	MODIFY DRAWING	2021.07.08	DRAWING NO. A2509HMA-XP	
A0	NEW RELEASE	2020.12.02		
REV	DESCRIPTION	DATE		
			REV A1	