

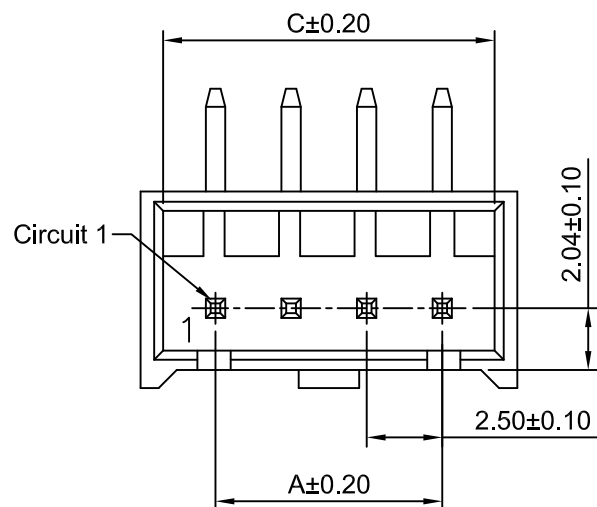
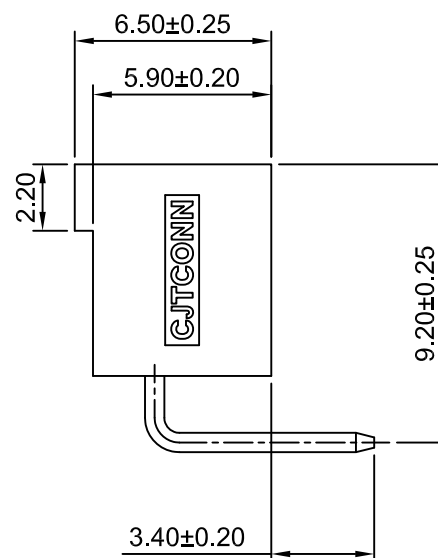


2P~3P

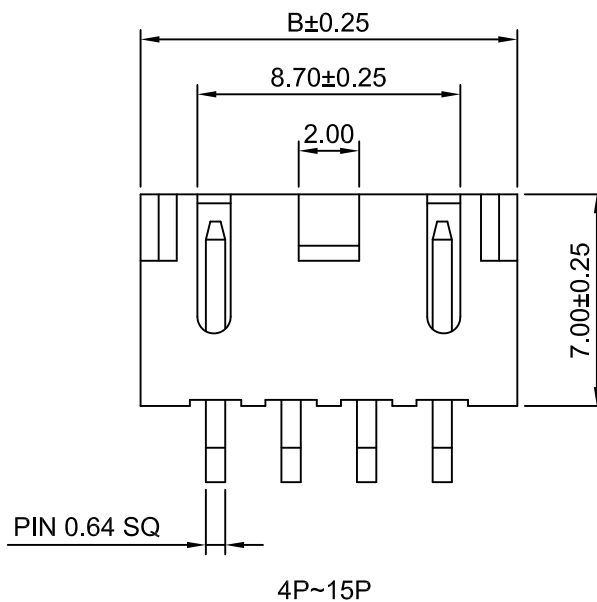

Ordering Information:
A2509WR-XP - ^{***}/₁ - ^{**}/₂ - ^{**}/₃ - ^{**}/₄

- Part No.
- Material:
(blank):Nylon 66+20%GF,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750°C
- Color:
(Blank):Natural
RD:Red
YL:Yellow
BL:Blue
- Finish:
(blank):Tin over Nickel
G:Gold over Nickel

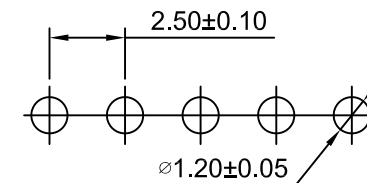

P.C.B LAYOUT

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage:1000VAC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66+20%GF,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	7.46	5.96	9P	20.00	24.96	23.46
3P	5.00	9.96	8.46	10P	22.50	27.46	25.96
4P	7.50	12.46	10.96	11P	25.00	29.96	28.46
5P	10.00	14.96	13.46	12P	27.50	32.46	30.96
6P	12.50	17.46	15.96	13P	30.00	34.96	33.46
7P	15.00	19.96	18.46	14P	32.50	37.46	35.96
8P	17.50	22.46	20.96	15P	35.00	39.96	38.46

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title : 2.50mm Pitch 90° Wafer	
mm	4:1	1 of 1		
Draw By:		Approved :		
Tony Su		Jack Yin		
General Tolerance				
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 	DRAW NO : A2509WR-XP	
			REV A0	