

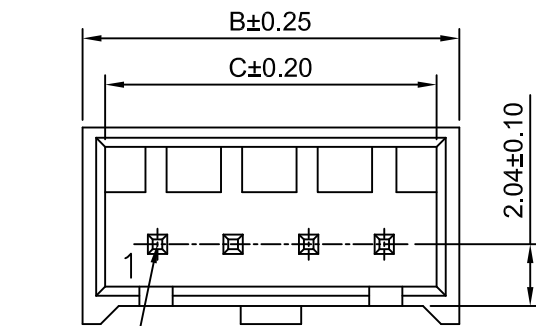


2P~3P

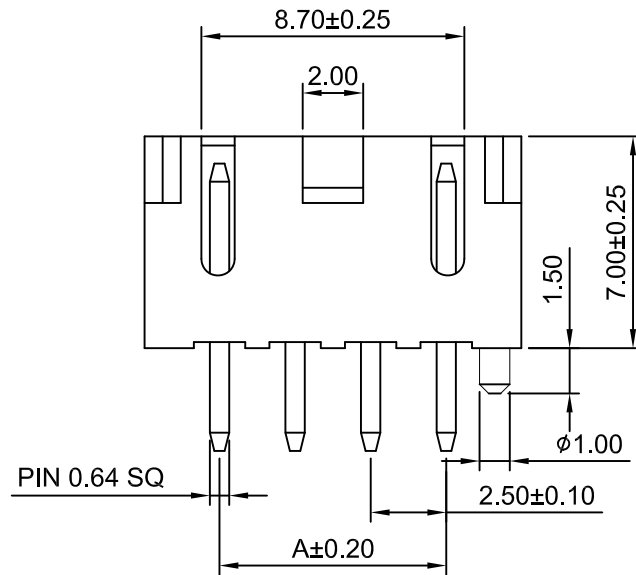

4P~15P

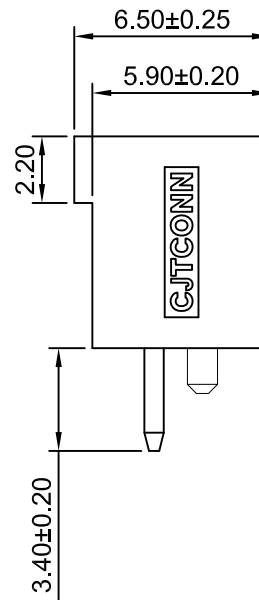

Ordering Information:

A2509WV-F-XP - $\frac{***}{1}$ - $\frac{**}{2}$ - $\frac{**}{3}$ - $\frac{**}{4}$

1.Part No.

2.Material:

(blank):Nylon 66+20%GF,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750 °C

3.Color:

(Blank):Natural

RD:Red


YL:Yellow

BL:Blue

4.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

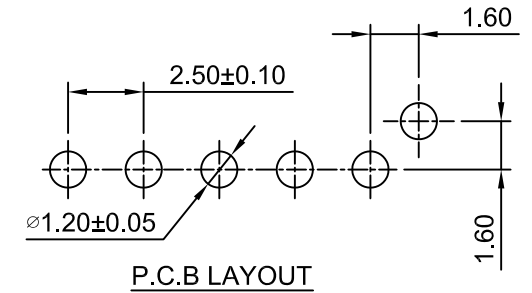

P.C.B LAYOUT

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage:1000VAC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66+20%GF,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	7.46	5.96	9P	20.00	24.96	23.46
3P	5.00	9.96	8.46	10P	22.50	27.46	25.96
4P	7.50	12.46	10.96	11P	25.00	29.96	28.46
5P	10.00	14.96	13.46	12P	27.50	32.46	30.96
6P	12.50	17.46	15.96	13P	30.00	34.96	33.46
7P	15.00	19.96	18.46	14P	32.50	37.46	35.96
8P	17.50	22.46	20.96	15P	35.00	39.96	38.46

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.50mm Pitch 180° Wafer			
mm		4:1		1 of 1					
Draw BY:			Approved :						
Tony Su			Jack Yin						
General Tolerance									
PROJECT									
5		x.xx±0.25 x.xx±0.20 x.xxx±0.15		PROJECT		DRAW NO : A2509WV-F-XP		REV A0	