


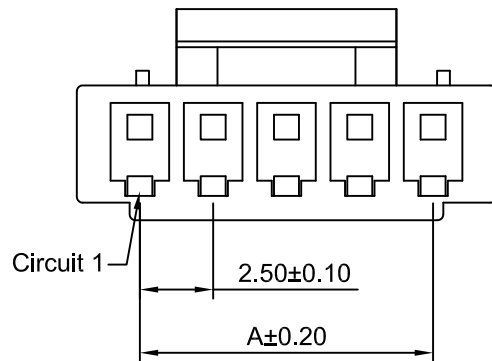




3P~16P

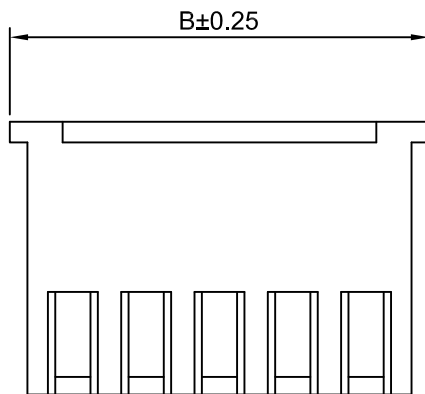

2P

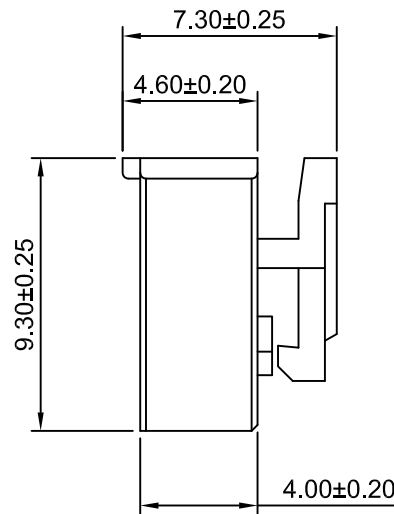

Ordering Information:

A2512H-XP - **


1 2

1.Part NO.

2.Color:

(blank):White

RD:Red



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon66, UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	6.80	9P	20.00	24.30
3P	5.00	9.30	10P	22.50	26.80
4P	7.50	11.80	11P	25.00	29.30
5P	10.00	14.30	12P	27.50	31.80
6P	12.50	16.80	13P	30.00	34.30
7P	15.00	19.30	14P	32.50	36.80
8P	17.50	21.80	15P	35.00	39.30

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1			
DRWN	CHK'D	APPR	2.50mm PITCH HOUSING		
Dengchun Yi	Dlankut Wan	Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION		
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.		
			A2512H-XP		
			REV A2		

A2	DELETE THE SIZE C	2020.08.19
A1	CHANGE THE DRAWING	2019.04.16
A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE