
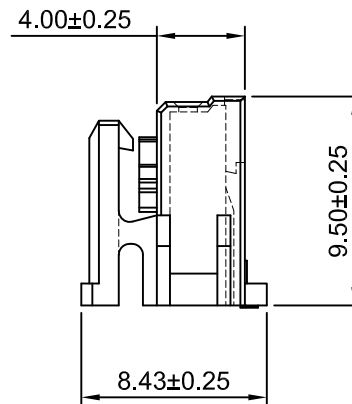
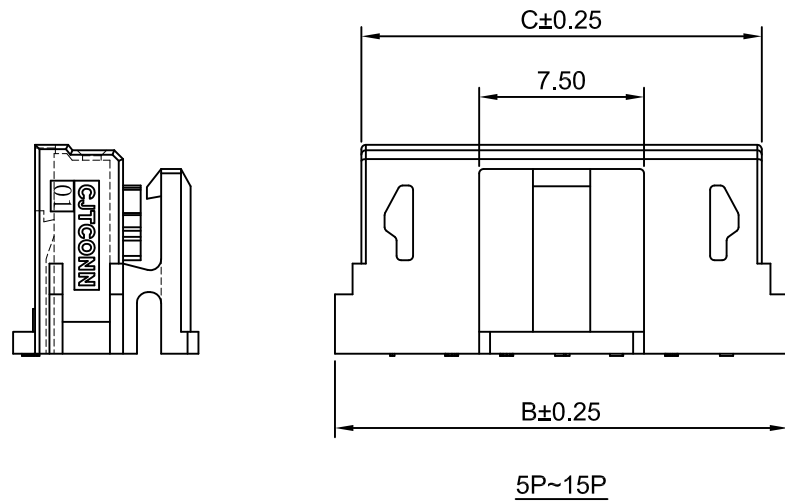
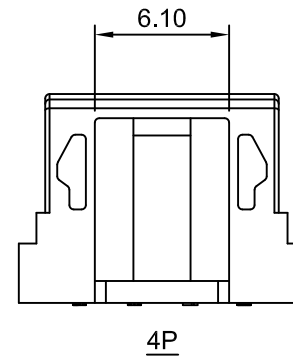
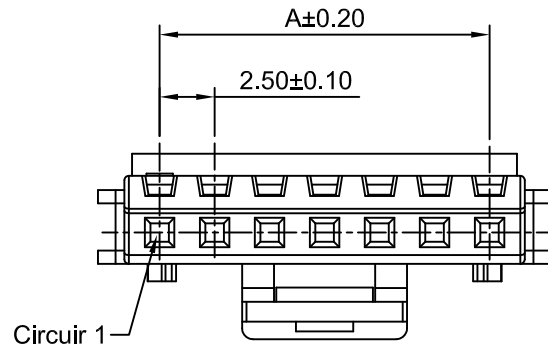


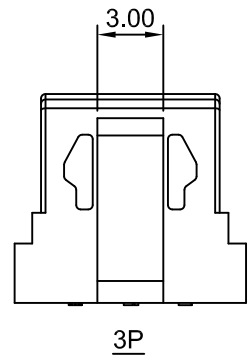

Ordering Information:

A2512HA-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank):see section 2 material

RD:Red

YL:Yellow

BL:Blue

BK:Black

GN:Green

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	C
A2512HA-3P	5.00	10.60	8.20	9.00
A2512HA-4P	7.50	13.10	10.70	11.50
A2512HA-5P	10.00	15.60	13.20	14.00
A2512HA-6P	12.50	18.10	15.70	16.50
A2512HA-7P	15.00	20.60	18.20	19.00
A2512HA-8P	17.50	23.10	20.70	21.50
A2512HA-9P	20.00	25.60	23.20	24.00
A2512HA-10P	22.50	28.10	25.70	26.50
A2512HA-11P	25.00	30.60	28.20	29.00
A2512HA-12P	27.50	33.10	30.70	31.50
A2512HA-13P	30.00	35.60	33.20	34.00
A2512HA-14P	32.50	38.10	35.70	36.50
A2512HA-15P	35.00	40.60	38.20	39.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.50mm PITCH HOUSING	
DRAWN	CHKD	APPR		
Dengchun Yi	Djankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			THIRD ANGLE PROJECTION	
A2	CHANGE THE DRAWING	2023.02.20	A2512HA-XP	
A1	CHANGE THE DRAWING	2020.08.27		
A0	NEW RELEASE	2016.09.20		
REV	DESCRIPTION	DATE	REV A2	