
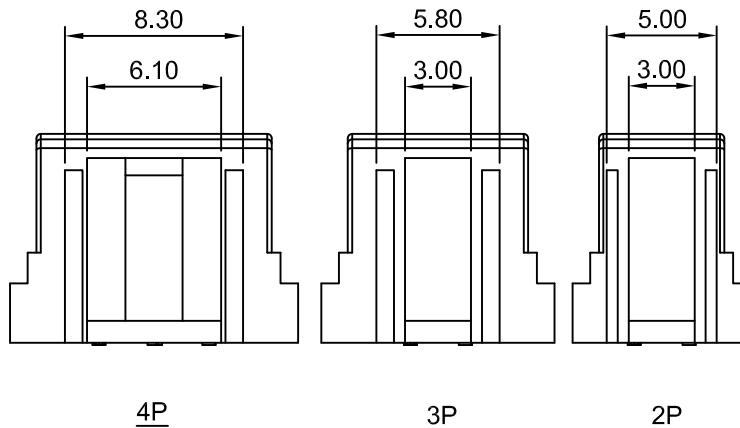


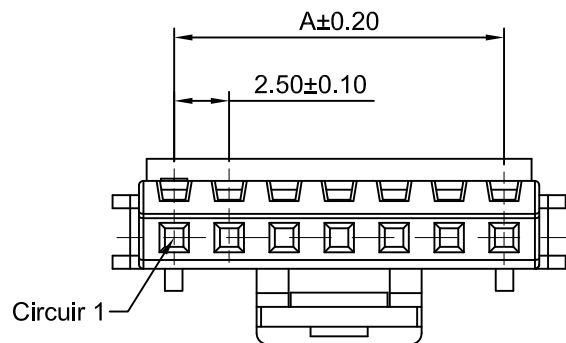

Ordering Information:
A2512HB-XP - ** - **
1 2 3

1.Part NO.
2.Material:
(Blank):Nylon 66,UL94V-0(White)
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:
(Blank):see section 2 material
YL:Yellow
RD:Red
BK:Black
BL:Blue
GN:Green


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 1000V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	8.10	9P	20.00	25.60
3P	5.00	10.60	10P	22.50	28.10
4P	7.50	13.10	11P	25.00	30.60
5P	10.00	15.60	12P	27.50	33.10
6P	12.50	18.10	13P	30.00	35.60
7P	15.00	20.60	14P	32.50	38.10
8P	17.50	23.10	15P	35.00	40.60

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 2.50mm PITCH Housing
mm	3:1	1 of 1	
DRAWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2512HB-XP
x,xx±0.25			
x,xxx±0.20			
x,xxxx±0.15			
ANGLES ±1°			REV A2

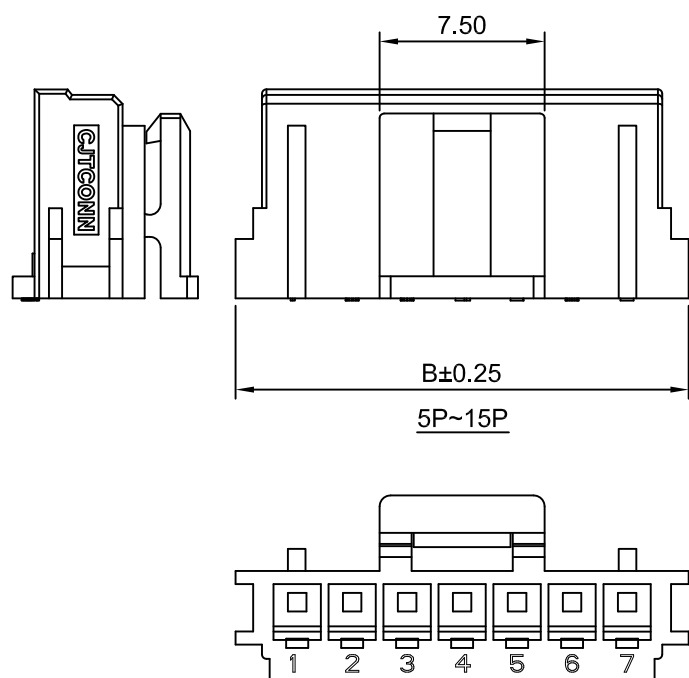

A2512HB-2P-A

A2	CHANGE THE DRAWING	2023.02.20
A1	CHANGE THE DRAWING	2021.06.11
A0	NEW RELEASE	2016.09.20
REV	DESCRIPTION	DATE