

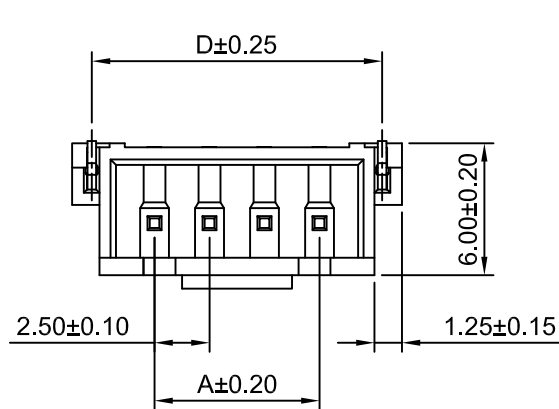
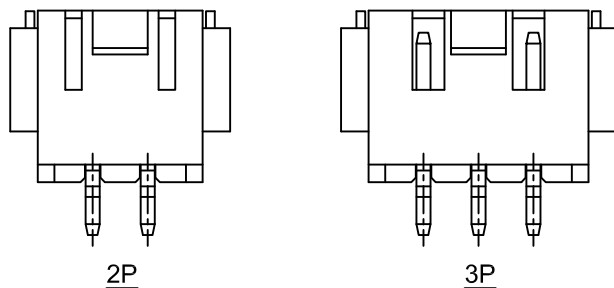
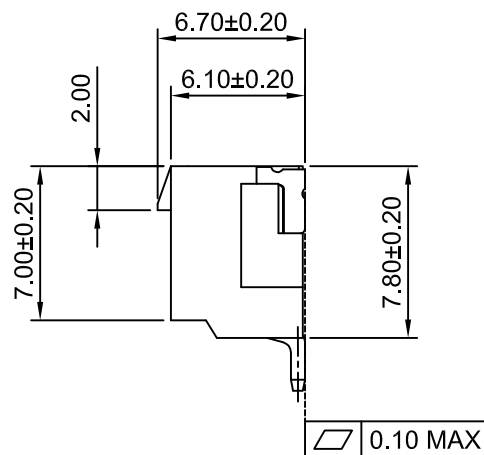


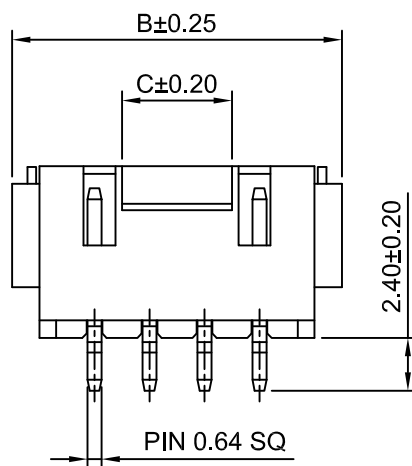

4P~16P

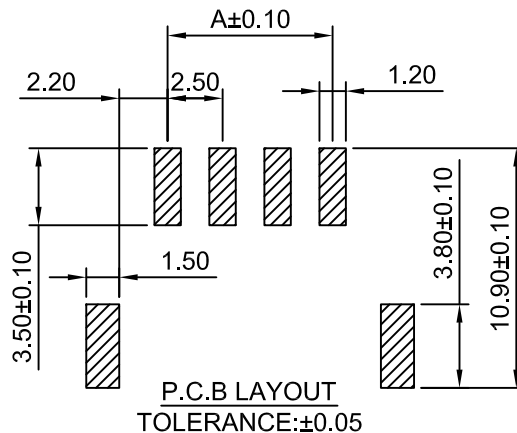

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 500V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Solder Tabs: Brass/Tin over Nickel
Material: LCP, UL94V-0 (Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				Circuits	Dimensions(mm)			
	A	B	C	D		A	B	C	D
2P	2.50	10.00	2.50	8.20	10P	22.50	30.00	20.00	28.20
3P	5.00	12.50	2.50	10.70	11P	25.00	32.50	22.50	30.70
4P	7.50	15.00	5.00	13.20	12P	27.50	35.00	25.00	33.20
5P	10.00	17.50	7.50	15.70	13P	30.00	37.50	27.50	35.70
6P	12.50	20.00	10.00	18.20	14P	32.50	40.00	30.00	38.20
7P	15.00	22.50	12.50	20.70	15P	35.00	42.50	32.50	40.70
8P	17.50	25.00	15.00	23.20	16P	37.50	45.00	35.00	43.20
9P	20.00	27.50	17.50	25.70					

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.50mm PITCH 90° WAFER - SMD TYPE		
mm	3:1	1 of 1			
DRWN	CHK'D	APPR			
Dengchun Yi	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2512WR-S-XP		REV A1
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					