

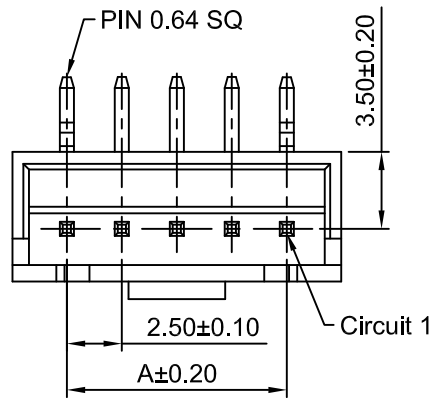
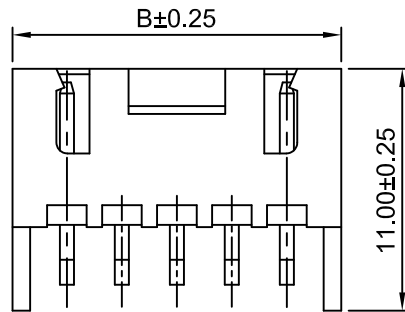



2P



3P~15P

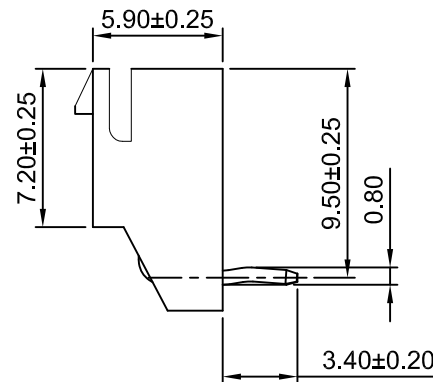

TYPE 1



TYPE 2

Ordering Information:

A2512WRA-XP - $\frac{**}{1} - \frac{**}{2} - \frac{**}{3}$

1.Part NO.

2.Style:

(Blank): Type 1

2: Type 2

3.Color:

(Blank):White


BL:Blue

BK:Black


RD:Red

YL:Yellow

GN:Green

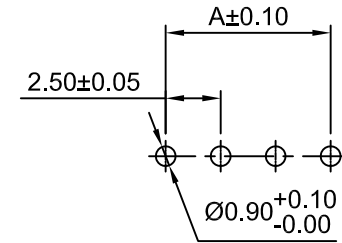

P.C.B LAYOUT



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
A2512WRA-2P	2.50	7.45	A2512WRA-9P	20.00	24.95
A2512WRA-3P	5.00	9.95	A2512WRA-10P	22.50	27.45
A2512WRA-4P	7.50	12.45	A2512WRA-11P	25.00	29.95
A2512WRA-5P	10.00	14.95	A2512WRA-12P	27.50	32.45
A2512WRA-6P	12.50	17.45	A2512WRA-13P	30.00	34.95
A2512WRA-7P	15.00	19.95	A2512WRA-14P	32.50	37.45
A2512WRA-8P	17.50	22.45	A2512WRA-15P	35.00	39.95

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		3:1		1 of 1		2.50mm PITCH RIGHT-ANGLE WAFER	
DRAWN		CHK'D		APPR			
Chengbiao Ye		Djankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A2512WRA-XP	
5 x.xx±0.25							
6 x.xxx±0.20							
x.xxxx±0.15							
ANGLES ±1°						REV A1	

A1	CHANGE THE DRAWING	2023.03.25
A0	NEW RELEASE	2020.08.26
REV	DESCRIPTION	DATE