

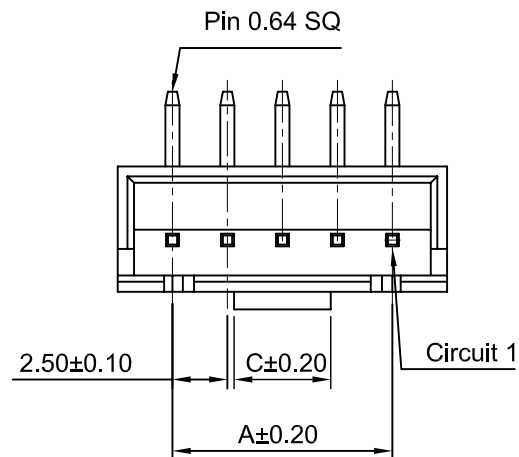



P.C.B LAYOUT



3~15P



2P

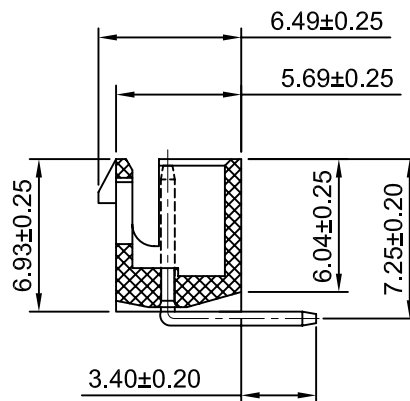

Ordering Information:

A2512WRB-XP - **
1 2

1.Part No.

2.Color:

(Blank):White

BL:Blue

BK:Black

RD:Red

YL:Yellow

GN:Green

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	7.50	1.60	9P	20.00	25.00	4.40
3P	5.00	10.00	2.50	10P	22.50	27.50	4.40
4P	7.50	12.50	3.00	11P	25.00	30.00	4.40
5P	10.00	15.00	4.40	12P	27.50	32.50	4.40
6P	12.50	17.50	4.40	13P	30.00	35.00	4.40
7P	15.00	20.00	4.40	14P	32.50	37.50	4.40
8P	17.50	22.50	4.40	15P	35.00	40.00	4.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :

2.50mm PITCH

90° WAFER

DRAW NO : A2512WRB-XP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.07.01

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	