
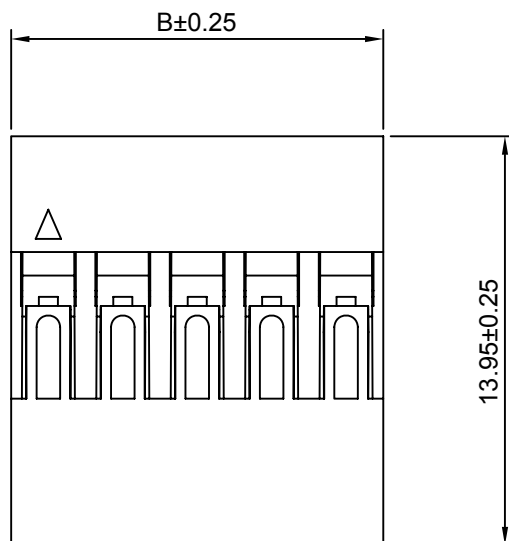
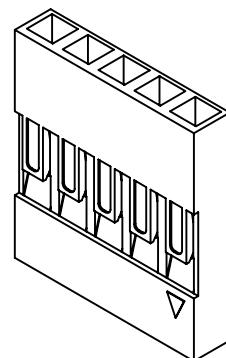


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: PBT, UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dim(mm)		Circuits	Dim(mm)		Circuits	Dim(mm)	
	A	B		A	B		A	B
1P	2.54	2.54	15P	35.56	38.10	28P	68.58	71.12
2P	2.54	5.08	16P	38.10	40.64	29P	71.12	73.66
3P	5.08	7.62	17P	40.64	43.18	30P	73.66	76.20
4P	7.62	10.16	18P	43.18	45.72	31P	76.20	78.74
5P	10.16	12.70	19P	45.72	48.26	32P	78.74	81.28
6P	12.70	15.24	20P	48.26	50.80	33P	81.28	83.82
7P	15.24	17.78	21P	50.80	53.34	34P	83.82	86.36
8P	17.78	20.32	22P	53.34	55.88	35P	86.36	88.90
9P	20.32	22.86	23P	55.88	58.42	36P	88.90	91.44
10P	22.86	25.40	24P	58.42	60.96	37P	91.44	93.98
11P	25.40	27.94	25P	60.96	63.50	38P	93.98	96.52
12P	27.94	30.48	26P	63.50	66.04	39P	96.52	99.06
13P	30.48	33.02	27P	66.04	68.58	40P	99.06	101.60
14P	33.02	35.56						

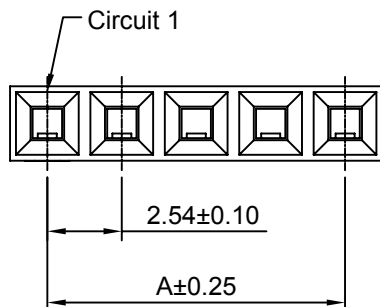

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
Draw BY:		Approved :
LIZQ		GONGYB

Title :		2.54mm PITCH
SINGLE ROW HOUSING		
DRAW NO :		A2541H-XP
REV		A0

General Tolerance		ANGLE±
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE