
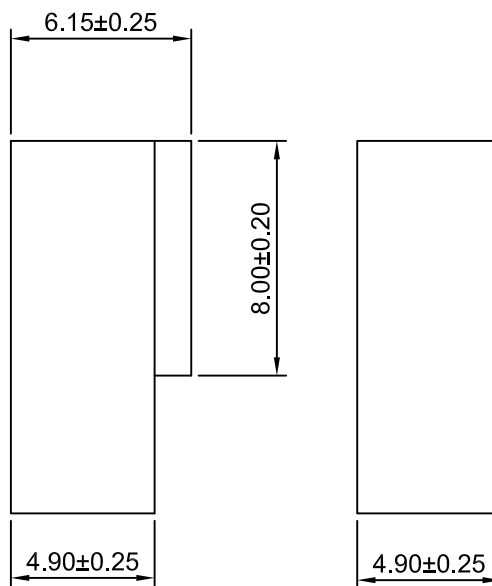
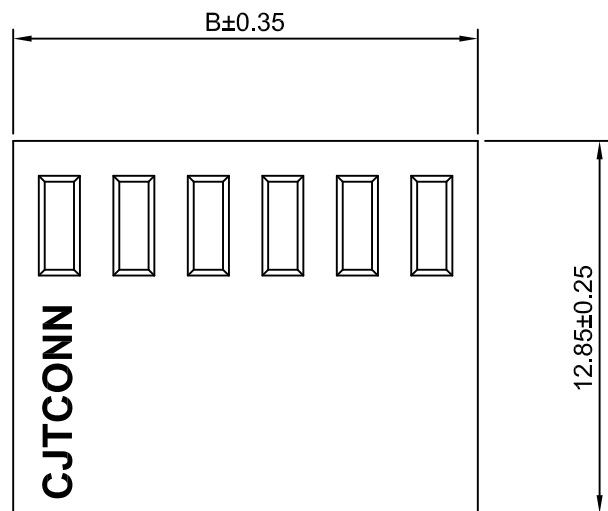



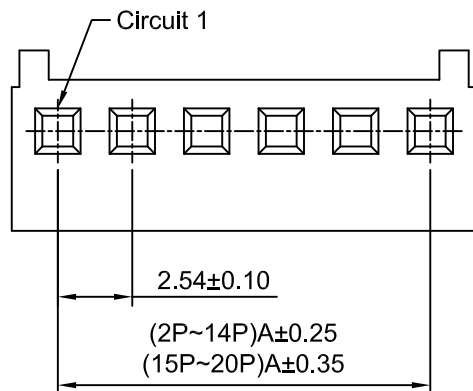

TYPE 1

TYPE 2

Ordering Information:

A2543H-XP - ^{**}/₂ - ^{***}/₃

1.Part NO.

2.Style:

(Blank): Type 1(Beige)

WH: Type 1(White)

2: Type 2(White)

3.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,GWT 750℃

SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40℃ ~ +105℃

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.68	12P	27.94	31.08
3P	5.08	8.22	13P	30.48	33.62
4P	7.62	10.76	14P	33.02	36.16
5P	10.16	13.30	15P	35.56	38.70
6P	12.70	15.84	16P	38.10	41.24
7P	15.24	18.38	17P	40.64	43.78
8P	17.78	20.92	18P	43.18	46.32
9P	20.32	23.46	19P	45.72	48.86
10P	22.86	26.00	20P	48.26	51.40
11P	25.40	28.54			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale			Sheet			TITLE		
mm			4:1			1 of 1					
DRAWN			CHK'D			APPR			2.54mm Pitch Housing		
Chengbiao Ye			Djankui Wan			Jack Yin					
General Tolerances						THIRD ANGLE PROJECTION					
x,xx±0.25											
x,xxx±0.20											
x,xxxx±0.15											
ANGLES ±1°											
						DRAWING NO.					
A2543H-XP						REV A3					

A3	CHANGE THE INFORMATION	2023.05.08
A2	CHANGE THE COLOR&MATERIAL	2019.05.13
A1	CHANGE THE INFORMATION	2019.01.14
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE