
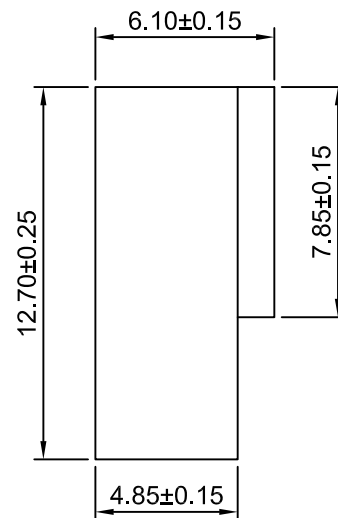
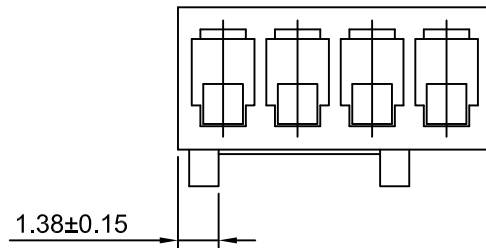
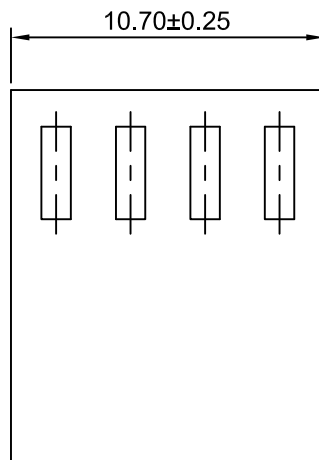


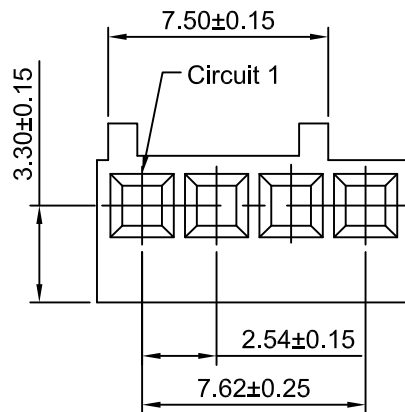

SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(White)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.54mm PITCH HOUSING	
mm	4:1	1 of 1		
DRAWN	CHK'D	APPR		
Wenmin Luo	Diankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION 	DRAWING NO. A2543HC-XP	REV A1
x.xx±0.25				
x.xx±0.20				
x.xx±0.15				
ANGLES ±1°				

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°



REV
A1