


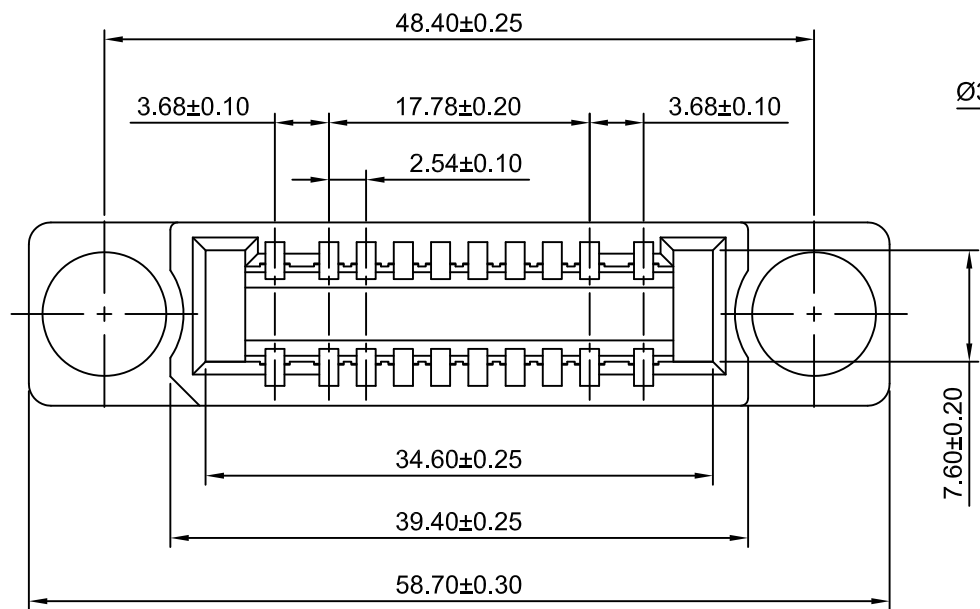
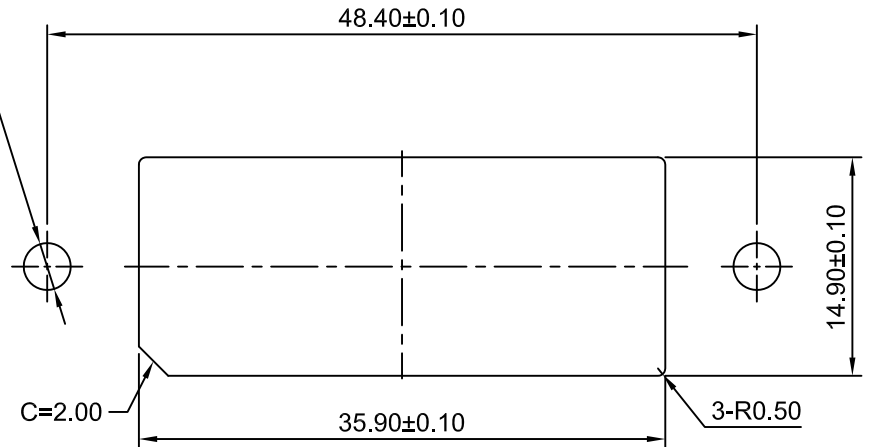


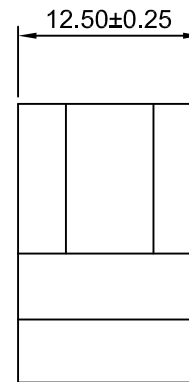

Ø3.20±0.10

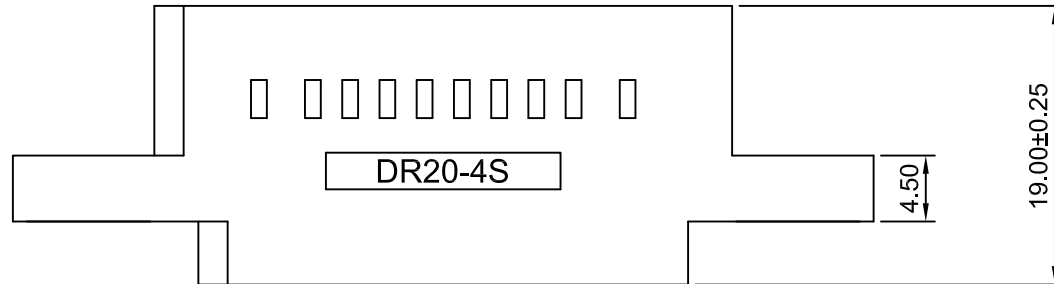


P.C.B LAYOUT

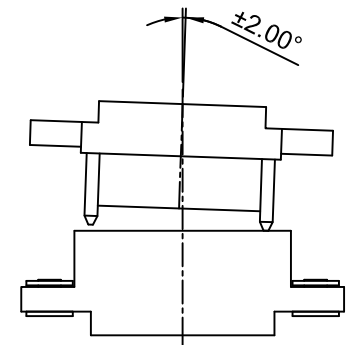

SPECIFICATIONS:

Current Rating: 5A AC,DC
Voltage Rating: 250V/600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 5000MΩ Min
Withstanding Voltage: 1000V/2000V AC/minute
Material: PBT,UL94V-0(Black)

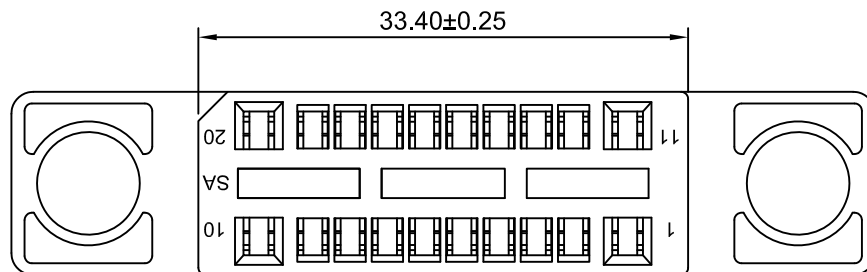

A1	CHANGE THE DRAWING	2023.03.16
A0	NEW RELEASE	2015.07.01
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 2.54mm PITCH Dual Row Housing
mm	2:1	1 of 1	
DRAWN	CHKD	APPR	
Chengbiao Ye	Diankui Wan	Jack Yin	
General Tolerances	THIRD ANGLE PROJECTION		DRAWING NO. A2543HMA-2x10P
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			
			REV A1