

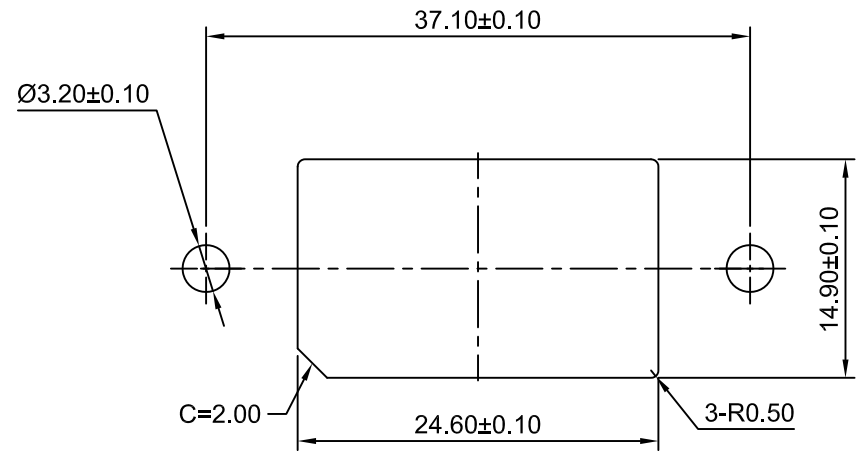
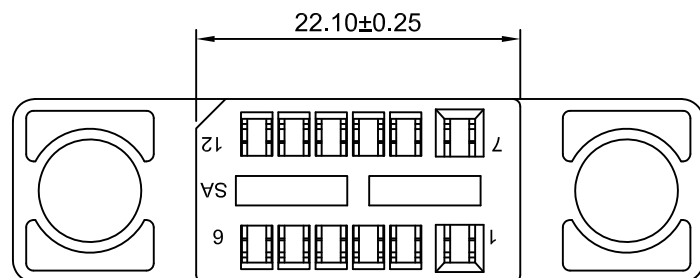
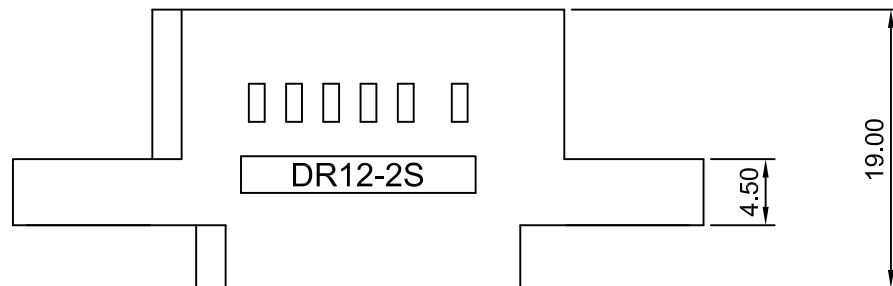


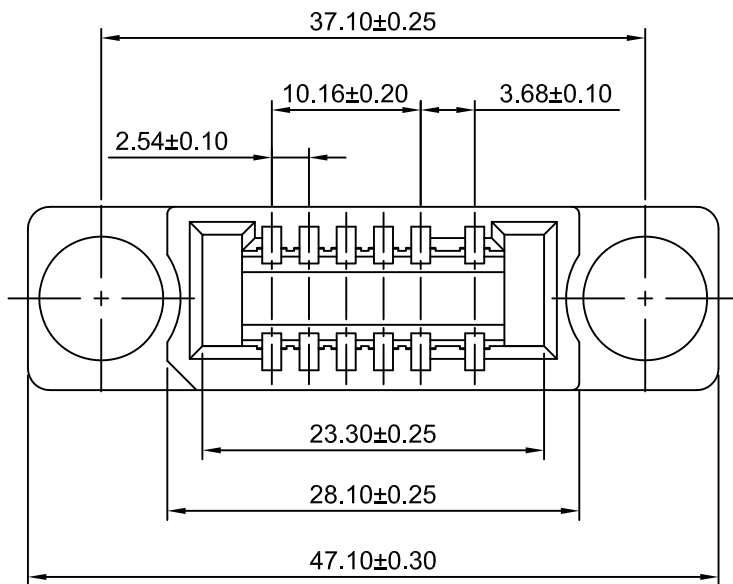

P.C.B LAYOUT

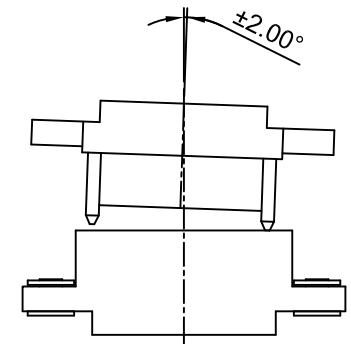

SPECIFICATIONS:

Current Rating: 5A AC,DC
Voltage Rating: 250V/600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 5000MΩ Min
Withstanding Voltage: 1000V/2000V AC/minute
Material: PBT,UL94V-0(Black)

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1	2.54mm PITCH Dual Row Housing		
DRAWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
		DRAWING NO.		REV A1	
		A2543HMA-2x6P			