

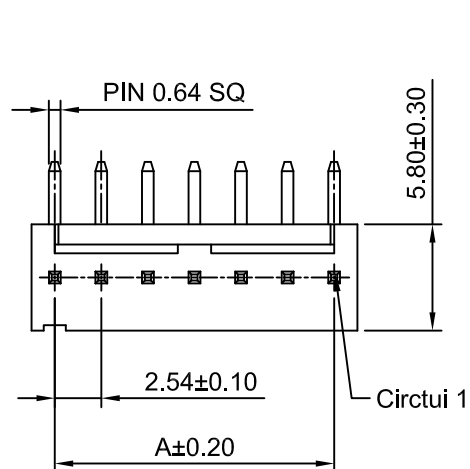




TYPE 2




2P~6P

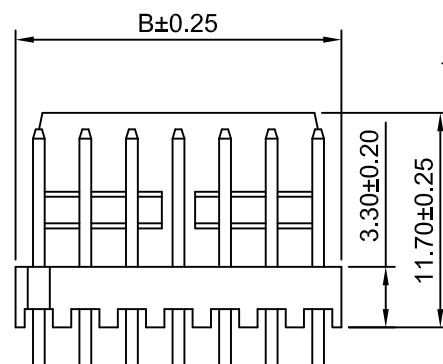

7P~20P

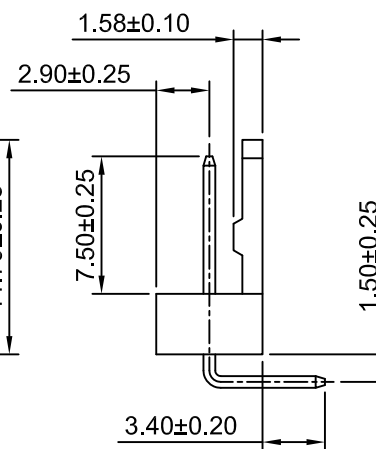

TYPE 1

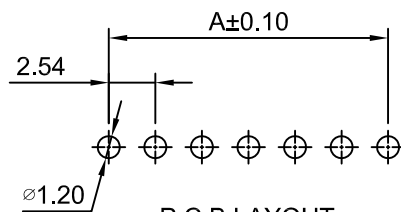

P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A2543WR-XP - **
1 2

1.Part No.

2.Style:

(blank) - Type 1

2 - Type 2

SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material:Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.08	12P	27.94	30.48
3P	5.08	7.62	13P	30.48	33.02
4P	7.62	10.16	14P	33.02	35.56
5P	10.16	12.70	15P	35.56	38.10
6P	12.70	15.24	16P	38.10	40.64
7P	15.24	17.78	17P	40.64	43.18
8P	17.78	20.32	18P	43.18	45.72
9P	20.32	22.86	19P	45.72	48.26
10P	22.86	25.40	20P	48.26	50.80
11P	25.40	27.94			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2.5:1	1 of 1	2.54mm PITCH 90° WAFER		
DRWN	CHK'D	APPR			
Wenmin Luo	Dianhui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2543WR-XP		A0

A0	NEW RELEASE	2019.07.12
REV	DESCRIPTION	DATE