

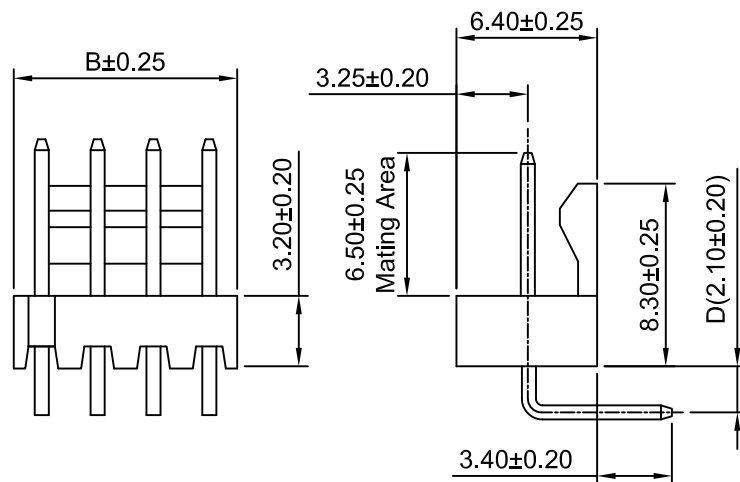



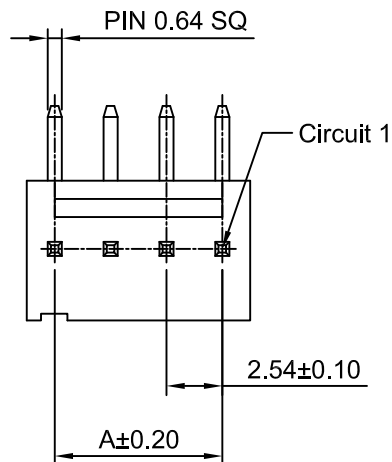

TYPE 1

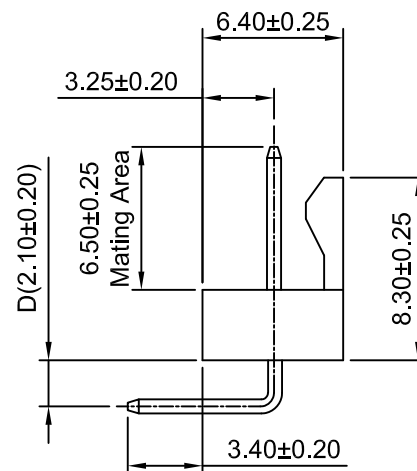

TYPE 2

Ordering Information:

A2543WRA-XP - * - BK- *** - ***
1 2 3 4

1.Part No.

2.Style:

(Blank) :Type 1

2 :Type 2

3:(Blank): Tin over Nickel

G: Gold over Nickel


G10: Gold over Nickel (Au:10u"Mating Area)

G15: Gold over Nickel (Au:15u"Mating Area)

4.Size D:

(Blank):2.1mm

D31:3.1mm



SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material:Brass

Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2543WRA-2P	2.54	5.08
A2543WRA-3P	5.08	7.62
A2543WRA-4P	7.62	10.16
A2543WRA-5P	10.16	12.70
A2543WRA-6P	12.70	15.24
A2543WRA-7P	15.24	17.78
A2543WRA-8P	17.78	20.32
A2543WRA-9P	20.32	22.86
A2543WRA-10P	22.86	25.40
A2543WRA-11P	25.40	27.94
A2543WRA-12P	27.94	30.48
A2543WRA-13P	30.48	33.02
A2543WRA-14P	33.02	35.56
A2543WRA-15P	35.56	38.10
A2543WRA-16P	38.10	40.64
A2543WRA-17P	40.64	43.18
A2543WRA-18P	43.18	45.72
A2543WRA-19P	45.72	48.26
A2543WRA-20P	48.26	50.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.54mm PITCH RIGHT-ANGLE WAFER	
mm	3:1	1 of 1		
DRWN	CHK'D	APPR		
Xu Lei	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2543WRA-XP-BK	REV A1
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				
				