
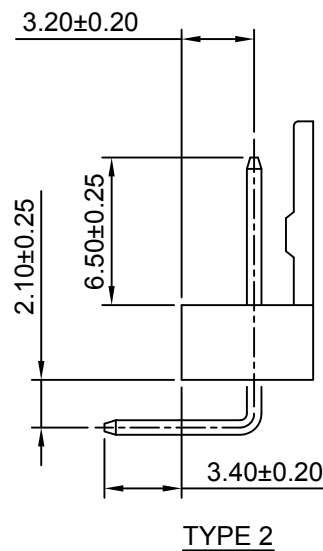
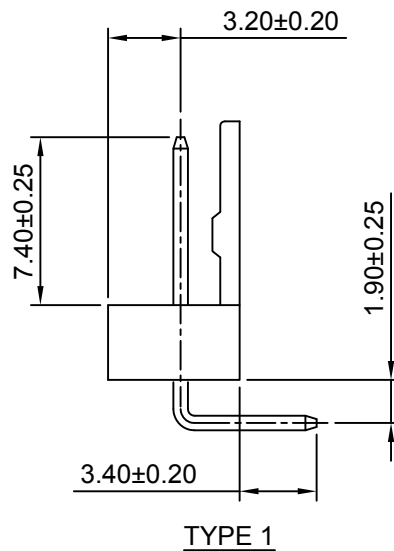
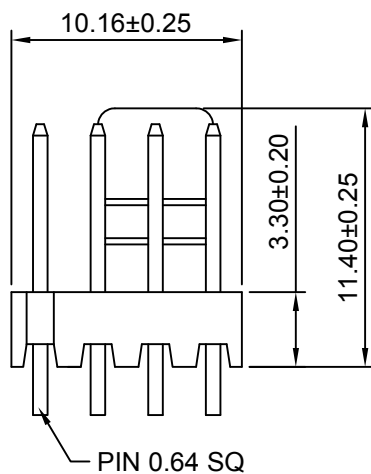



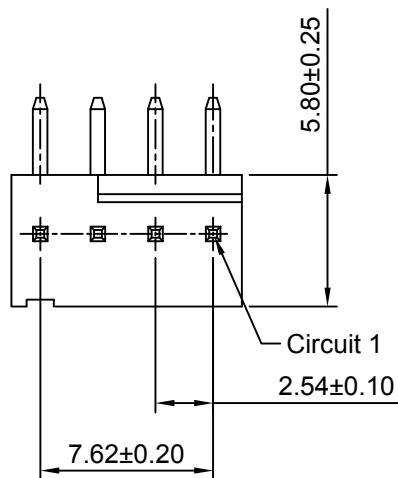

Ordering Information:

A2543WRE-4P - * - *** - **
1 2 3 4

1.Part No.

2.Style:

(blank) :Type 1

2 :Type 2

3.Material:

(Blank):Nylon 66,UL94V-2

V0:Nylon 66,UL94V-0

46:Nylon 46,UL94V-0

6T:Nylon 6T,UL94V-0

4.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material:Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Beige)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1

Title :

2.54mm PITCH

Draw BY:	Approved :
LIZQ	GONGYB

90° WAFER

General Tolerance	
x.x±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

DRAW NO : A2543WRE-4P

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEEASE	2005.05.10