
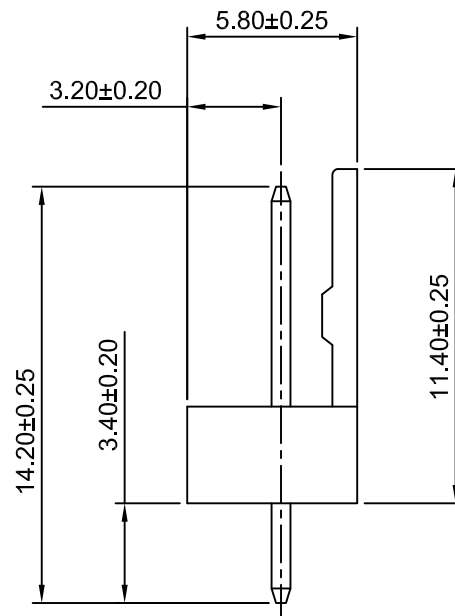
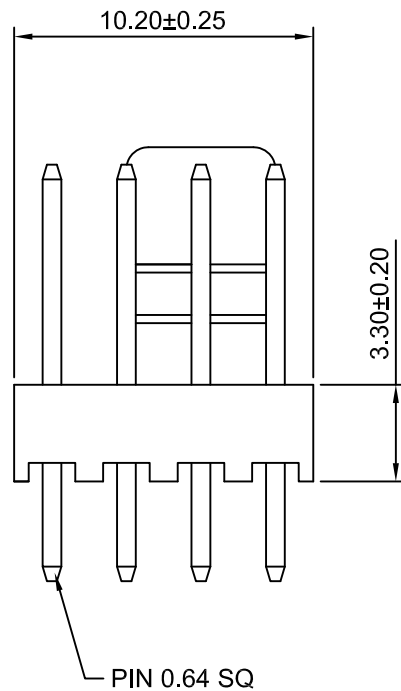
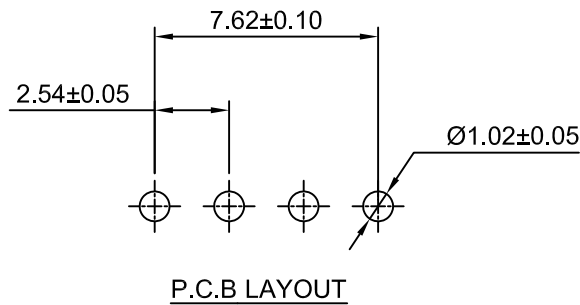


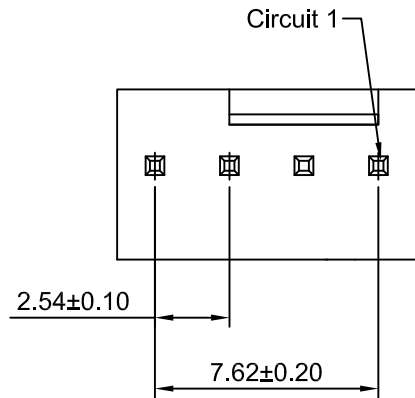

#### Ordering Information:

A2543WVC-4P - \*\*\* - \*\*\* - \*\*\* - \*\*\*  
1 2 3 4 5

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(Beige)

46: Nylon 46,UL94V-0(Natural)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition  
Glow Wire Capable.

3.Halogen:

(Blank):Normal Material

HF: Halogen Free

4.Color:

(Blank):see section 2 material

BR: Brown

5.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

#### SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material:Brass

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

|                                                      |  |  |                                                                                       |  |          |  |                                |  |
|------------------------------------------------------|--|--|---------------------------------------------------------------------------------------|--|----------|--|--------------------------------|--|
| Unit                                                 |  |  | Scale                                                                                 |  | Sheet    |  | TITLE                          |  |
| mm                                                   |  |  | 4:1                                                                                   |  | 1 of 1   |  |                                |  |
| DRAWN                                                |  |  | CHK'D                                                                                 |  | APPR     |  |                                |  |
| Chengbiao Ye                                         |  |  | Djankui Wan                                                                           |  | Jack Yin |  | 2.54mm Pitch<br>Vertical Wafer |  |
| General Tolerances                                   |  |  | THIRD ANGLE<br>PROJECTION                                                             |  |          |  |                                |  |
| x,xx±0.25<br>x,xxx±0.20<br>x,xxxx±0.15<br>ANGLES ±1° |  |  |  |  |          |  |                                |  |
| DRAWING NO.                                          |  |  |                                                                                       |  |          |  | REV<br>A3                      |  |
| A2543WVC-4P                                          |  |  |                                                                                       |  |          |  |                                |  |

|     |                    |            |
|-----|--------------------|------------|
| A3  | CHANGE THE DRAWING | 2023.04.14 |
| A2  | CHANGE THE DRAWING | 2023.03.08 |
| A1  | CHANGE THE DRAWING | 2019.05.16 |
| A0  | NEW RELEASE        | 2012.08.22 |
| REV | DESCRIPTION        | DATE       |