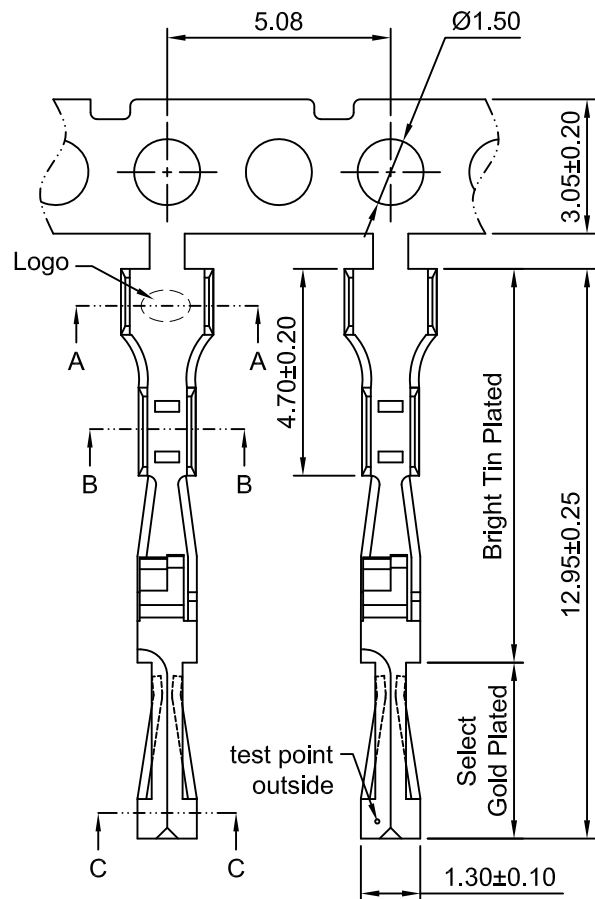


Ordering Information:

A2547-GP-L - ***
1 2

1.Part NO.


2.Finish:

(Blank): Gold over Nickel (Au:1u"Mating area)


G3: Gold over Nickel (Au:3u"Mating area)

G15: Gold over Nickel (Au:15u"Mating area)


G30: Gold over Nickel (Au:30u"Mating area)



SEC:A-A



SEC:B-B

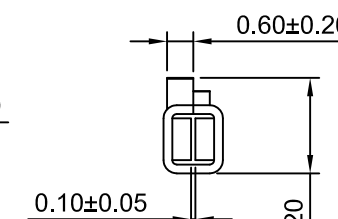

SEC:C-C

Part NO.	Finish			Salt spray/H	Remarks
	Ni / u"	Tin / u"	Au / u"		
A2547-TP-L	≥30	≥80		24	Bright Tin Plated, Pre-stamping
A2547-GP-L	≥30	≥80	1	24	Gold Plated Bright Tin, Pre-stamping

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2547-TP-L	AWG#24-#30	1.60mm(max)	Phosphor Bronze	Tin over Nickel	10,000 PCS
A2547-GP-L	AWG#24-#30	1.60mm(max)	Phosphor Bronze	Gold over Nickel	10,000 PCS

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A5	MODIFY DRAWING	2021.07.12
A4	CHANGE THE DRAWING	2019.12.30
A3	CHANGE THE DRAWING	2019.11.11
A2	CHANGE SIZE	2019.09.10
A1	MODIFY THE MOLD	2016.11.11
A0	NEW RELEASE	2011.03.26
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	6:1	1 of 1
DRWN	CHK'D	APPR
Dengchun Yi	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		

TITLE		
2.54mm PITCH CRIMP TERMINAL		
DRAWING NO.		REV
A2547-T-L		A5