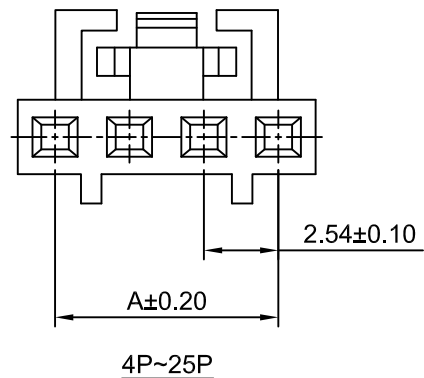


Ordering Information:

A2547H-XP - ***
1 2

1.Part NO.

2.Color:

(Blank): Black

WH: White

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max



Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: PBT,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.08	14P	33.02	35.56
3P	5.08	7.62	15P	35.56	38.10
4P	7.62	10.16	16P	38.10	40.64
5P	10.16	12.70	17P	40.64	43.18
6P	12.70	15.24	18P	43.18	45.72
7P	15.24	17.78	19P	45.72	48.26
8P	17.78	20.32	20P	48.26	50.80
9P	20.32	22.86	21P	50.80	53.34
10P	22.86	25.40	22P	53.34	55.88
11P	25.40	27.94	23P	55.88	58.42
12P	27.94	30.48	24P	58.42	60.96
13P	30.48	33.02	25P	60.96	63.50

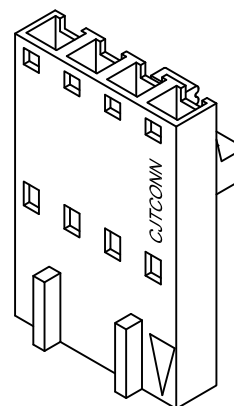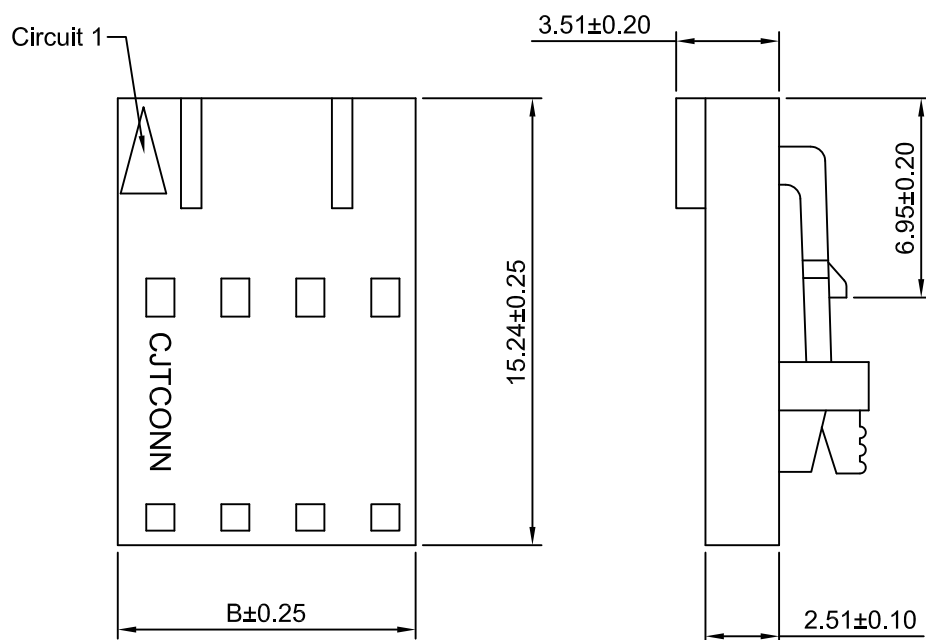

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 2.54mm PITCH Housing			
mm		4:1		1 of 1					
DRAWN		CHK'D		APPR					
Chengbiao Ye		Diankui Wan		Jack Yin		DRAWING NO. A2547H-XP			
General Tolerances				THIRD ANGLE PROJECTION					
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°									
REV		DESCRIPTION				DATE		REV A2	

A2	CHANGE THE DRAWING	2023.02.09
A1	CHANGE THE DRAWING	2022.03.22
A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE