
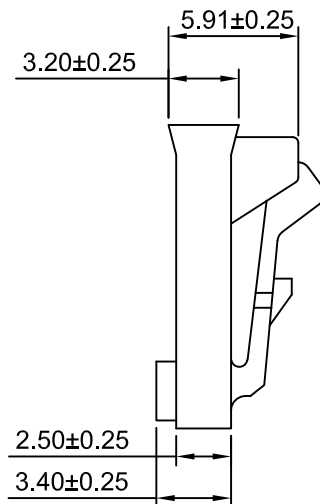
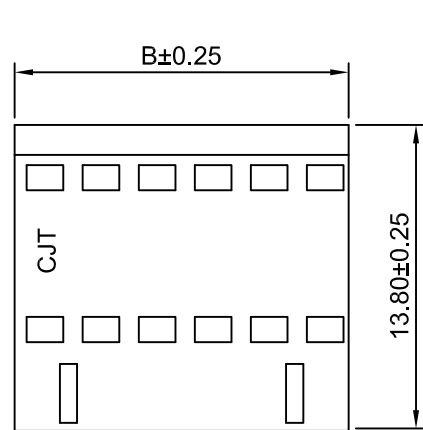





SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.02	14P	33.02	35.50
3P	5.08	7.56	15P	35.56	38.04
4P	7.62	10.10	16P	38.10	40.58
5P	10.16	12.64	17P	40.64	43.12
6P	12.70	15.18	18P	43.18	45.66
7P	15.24	17.72	19P	45.72	48.20
8P	17.78	20.26	20P	48.26	50.74
9P	20.32	22.80	21P	50.80	53.28
10P	22.86	25.34	22P	53.34	55.82
11P	25.40	27.88	23P	55.88	58.36
12P	27.94	30.42	24P	58.42	60.90
13P	30.48	32.96	25P	60.96	63.44

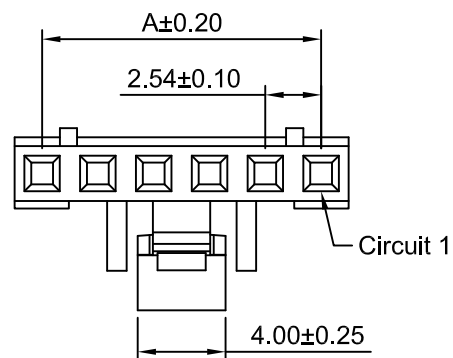


6P~25P

4P~5P

3P

2P



CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		3:1		1 of 1			
DRWN		CHK'D		APPR			
Wenmin Luo		Diankui Wan		Jack Yin		2.54mm PITCH Housing	
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				A2547HA-XP		REV A2	

A2	CHANGE THE DRAWING	2021.04.14
A1	CHANGE THE CIRCUIT 1	2020.03.17
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE