
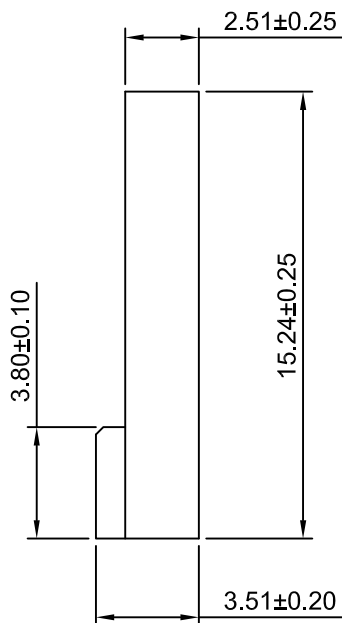
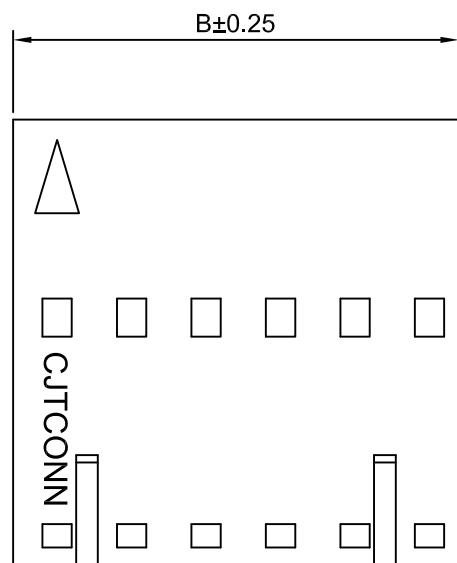




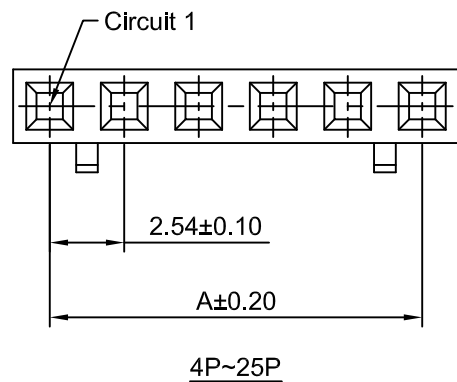

SPECIFICATIONS:

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.08	14P	33.02	35.56
3P	5.08	7.62	15P	35.56	38.10
4P	7.62	10.16	16P	38.10	40.64
5P	10.16	12.70	17P	40.64	43.18
6P	12.70	15.24	18P	43.18	45.72
7P	15.24	17.78	19P	45.72	48.26
8P	17.78	20.32	20P	48.26	50.80
9P	20.32	22.86	21P	50.80	53.34
10P	22.86	25.40	22P	53.34	55.88
11P	25.40	27.94	23P	55.88	58.42
12P	27.94	30.48	24P	58.42	60.96
13P	30.48	33.02	25P	60.96	63.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1			
DRAWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin	2.54mm PITCH Housing		
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
			DRAWING NO.	REV A1	
			A2547HE-XP		

A1	CHANGE THE DRAWING	2023.03.24
A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE