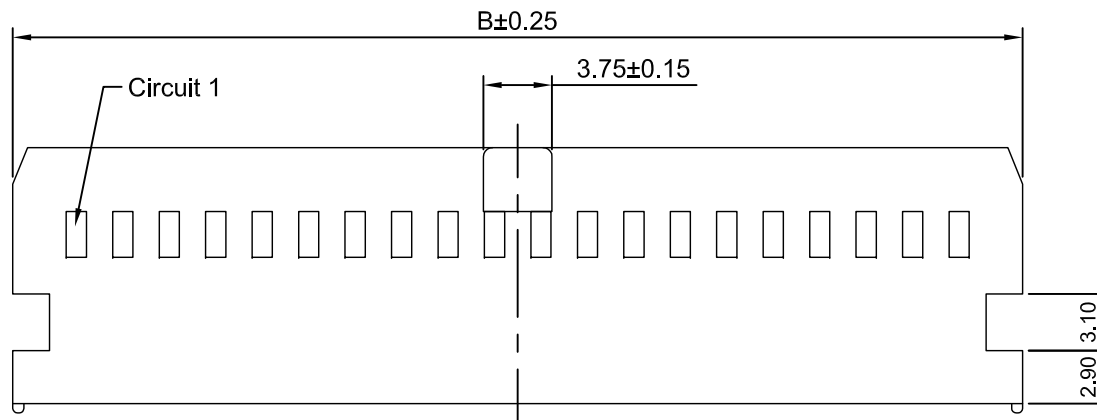


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2547HS-2x5P	10.16	17.10
A2547HS-2x7P	15.24	22.18
A2547HS-2x8P	17.78	24.72
A2547HS-2x10P	22.86	29.80
A2547HS-2x12P	27.94	34.88
A2547HS-2x13P	30.48	37.42
A2547HS-2x15P	35.56	42.50
A2547HS-2x17P	40.64	47.58
A2547HS-2x20P	48.26	55.20
A2547HS-2x22P	53.34	60.28
A2547HS-2x25P	60.96	67.90

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1		
DRWN	CHK'D	APPR	2.54mm PITCH Dual Row Housing	
Wenmin Luo	DianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2547HS-2xXP	REV A1
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				

A1	CHANGE THE DRAWING	2022.05.23
A0	NEW RELEASE	2014.07.01
REV	DESCRIPTION	DATE