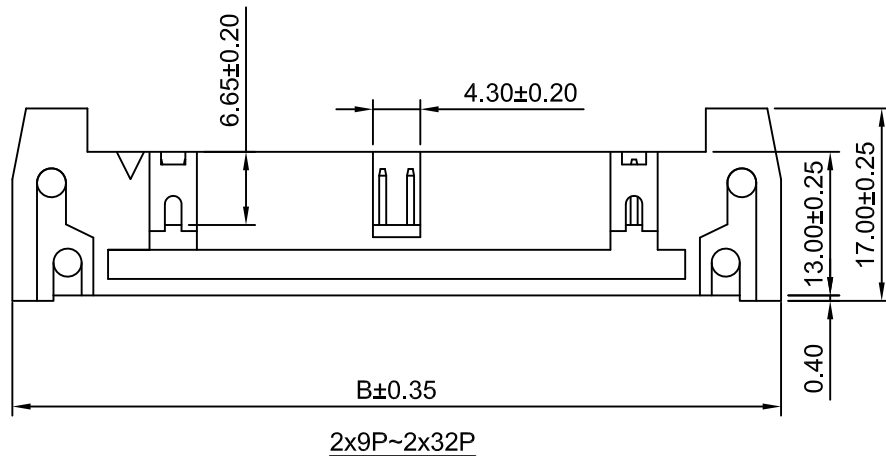
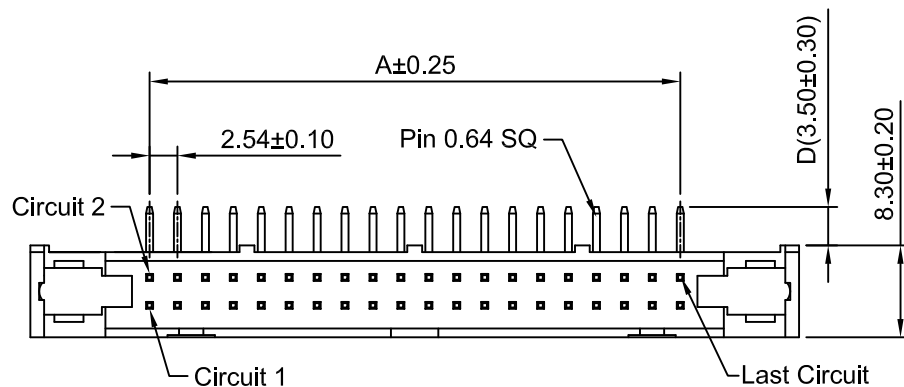


P.C.B LAYOUT
TOLERANCE:±0.05

Odering Information:
A2547WR-2xXP-N - ** - ** - **
1 2 3 4

1.Part No.

2.Material:

(Blank): PBT,UL94V-0(Black)

6T: Nylon 6T,UL94V-0(Black)

3.Color:

(Blank):Black

GY:Gray

BL: Blue


4.Finish:

(Blank): Gold over Nickel(Au:1u")

G15: Gold over Nickel(Au:15u",Mating Area),
other area,Tin over Nickel

G30: Gold over Nickel(Au:30u",Mating Area),
other area,Tin over Nickel

T: Tin over Nickel



2x3P~2x8P

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x3P	5.08	26.82	2x12P	27.94	49.68
2x4P	7.62	29.36	2x13P	30.48	52.22
2x5P	10.16	31.90	2x15P	35.56	57.30
2x6P	12.70	34.44	2x17P	40.64	62.38
2x7P	15.24	36.98	2x20P	48.26	70.00
2x8P	17.78	39.52	2x25P	60.96	82.70
2x9P	20.32	42.06	2x30P	73.66	95.40
2x10P	22.86	44.60	2x32P	78.74	100.48

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.54mm Pitch Right angle Box Header		
mm	1:5:1	1 of 1			
DRAWN	CHK'D	APPR			
Haisen Li	Diānkui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2547WR-2xXP-N		REV A0
x,xxx±0.25 x,xxx±0.20 x,xxx±0.15 ANGLES ±1°					
					

A0	NEW RELEASE	2023.12.05
REV	DESCRIPTION	DATE