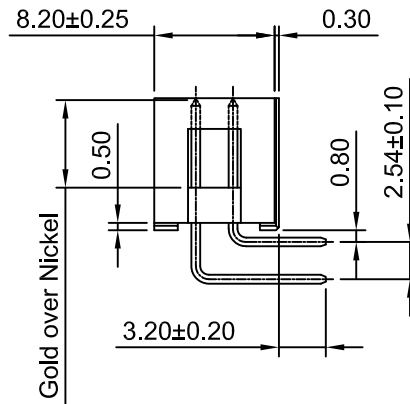
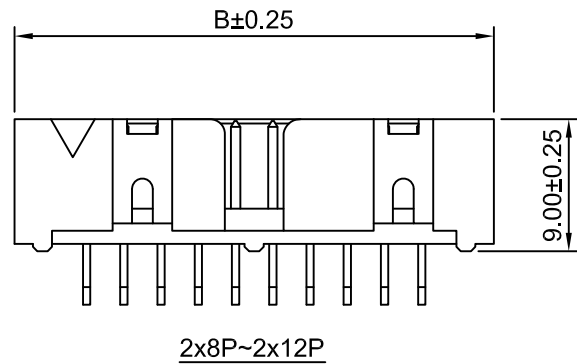
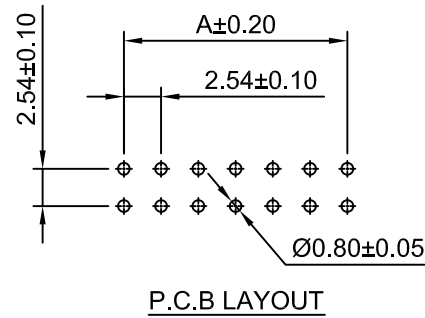
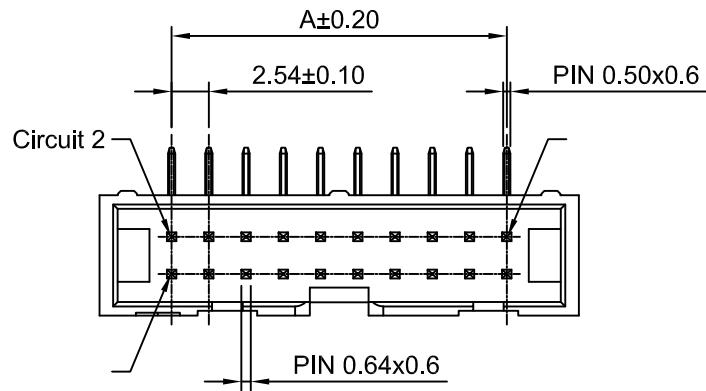


Ordering Information:
A2547WRA-N-2xXP - *** - ** - ***
1 2 3 4

1.Part No.
2.Material:
(blank):PBT,UL94V-0
6T:Nylon 6T,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃
3.Color:
(blank):Black
GY:Gray
BL:Blue
4.Finish:
(blank):Gold over Nickel(1u")
G15:Gold over Nickel(15u")
G30:Gold over Nickel(30u")
T:Tin over Nickel

SPECIFICATIONS:
Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40℃ ~ +105℃
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	10.16	20.00	2x15P	35.56	45.40
2x7P	15.24	25.08	2x17P	40.64	50.48
2x8P	17.78	27.62	2x20P	48.26	58.10
2x10P	22.86	32.70	2x25P	60.96	70.80
2x12P	27.94	37.78	2x30P	73.66	83.50
2x13P	30.48	40.32	2x32P	78.74	88.58

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	2.54mm Pitch Right angle Box Header	
DRAWN	CHK'D	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A2547WRA-N-2xXP	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION	
REV			REV A3	
DESCRIPTION			DATE	
A3			2019.02.14	
A2			2018.05.02	
A1			2017.01.10	
A0			2015.07.01	